

SONY


2015 Spring

Sony Overseas Models Products Catalog

索尼海外规格产品目录
オーバーシーズモデル総合カタログ

The latest Sony products you can enjoy around the world

您在全球范围内可享受到的最新索尼产品

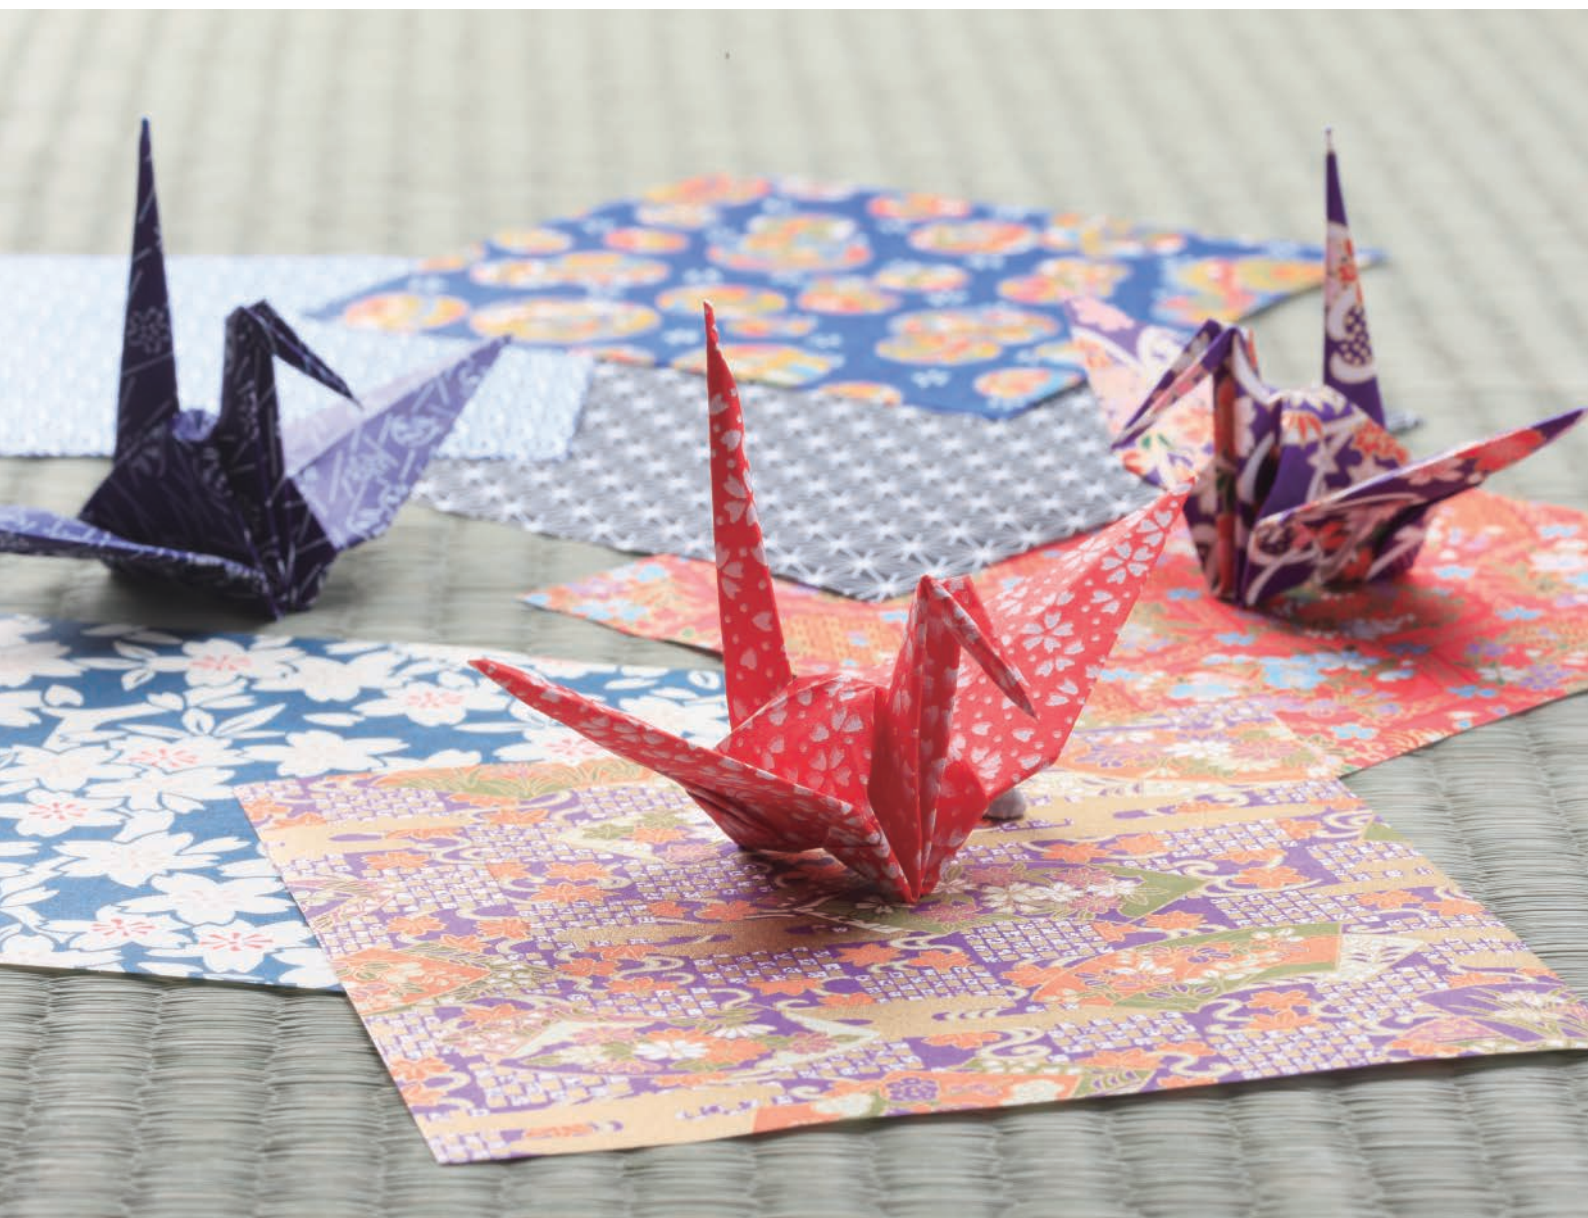

**Sony
Overseas
Models**

索尼海外规格产品

sony.jp/overseas/

BE MOVED




Your best choice of Sony Products in Japan

您可以在日本放心购买的索尼产品

Safety for Use 有保无忧

Warranty service covering 53 countries and regions

在53个国家和地区均可享受保修服务

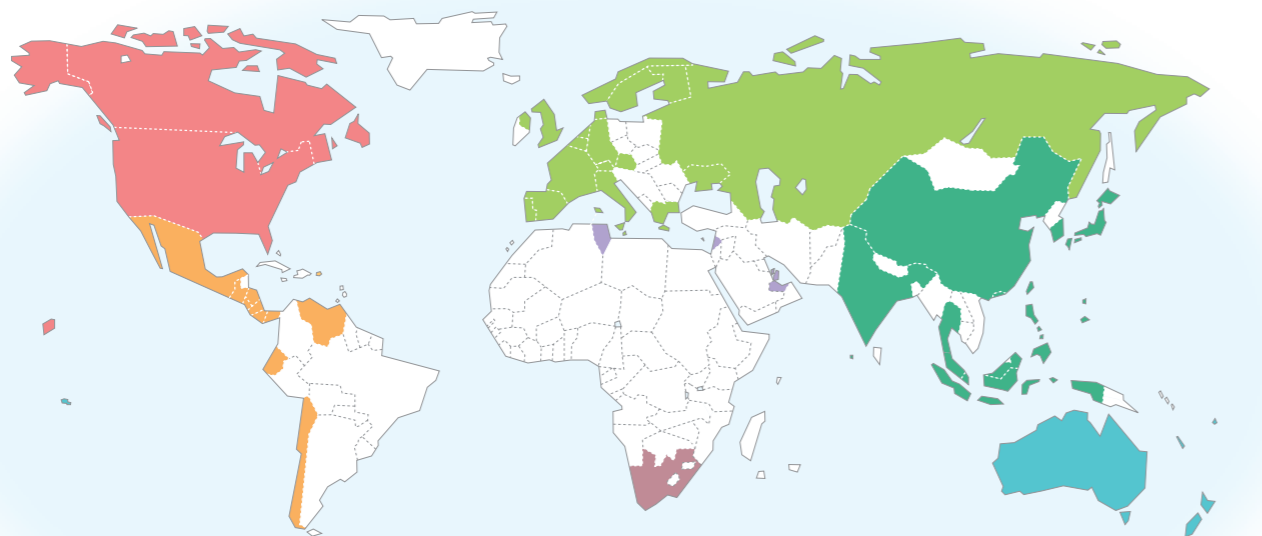

- North America**
U.S.A. / Canada
- Latin America**
Puerto Rico / Chile / Panama / Venezuela / Mexico / Costa Rica / Ecuador / El Salvador / Guatemala / Honduras / Nicaragua
- Africa*1**
South Africa
- Middle East*1**
U.A.E. / Qatar / Bahrain / Lebanon / Tunisia
- Oceania*1**
Australia / New Zealand / Fiji / Tahiti / New Caledonia
- Asia*1**
Singapore / Malaysia / Hong Kong / Korea / Philippines / Maldives / Thailand / Taiwan / India / Indonesia / Japan / China*2
- Europe*3**
Belgium / Switzerland / Germany / Denmark / Spain / Portugal / Austria / Greece / France / Finland / Italy / Norway / Netherlands / Sweden / U.K. / Russia / Ukraine

Map illustration shown may differ from actual landscape. (This warranty service is as of February 2015)
地图可能跟实际情形不同,仅供参考(此保修服务调查时间为2015年2月)

*Recording Media products target different countries and areas, please refer to page 15 for detailed specifications. 有关针对不同国家和地区的媒体产品的详细规格,请参阅第15页。

After-sales service*4 售后服务*4

The Overseas Models are covered by a common warranty in a wide range of countries/regions

海外规格产品在许多国家/地区均可享受保修服务

◎ Common warranty service is offered in 53 countries/regions. 53个国家/地区享受保修服务。

In case you should experience problems with Japanese version products, you may face a number of difficulties when trying to resolve these outside of Japan. For example, there may be no spare parts available, or it may take long repair time or additional fees. However, with Sony Overseas Models, you automatically receive a common 1 year warranty, which is valid in 53 countries/regions around the world. This ensures you free 1 year coverage on your purchased products.

如果遇到日语版本产品方面的问题,尝试在日本以外的地区解决可能会面临许多困难。例如,可能没有备件,维修时间过长或产生额外费用。但是对于索尼海外规格产品,可自动获得在全球53个国家/地区有效的1年保修服务,确保您所购买产品享受1年免费保修。

*1 For Middle Eastern, African, Asian or Oceanian countries and regions not listed above, please Email us from the "Contact Us" section at: <http://www.css.ap.sony.com> 有关上述未列的中东、非洲、亚洲或大洋洲国家和地区,请在下列网站的“联系我们”网页中发送电子邮件给我们: <http://www.css.ap.sony.com> *2 China Limited Warranty sticker should be attached on the warranty card. 保修卡上须附有中国保修贴条。 *3 For European countries not listed above, please contact: The European Sony Customer Care Center in Belgium. 有关上述未列的欧洲国家,请联系:位于比利时的欧洲索尼客服中心。 *4 Warranty services for some products may not be provided, or differ in some countries and regions. For more details, please consult your nearest Sony Overseas Models dealers in Japan. 部分产品可能无法提供保修服务,或者因国家和地区而异。如需了解详情,请就近向日本的索尼海外规格产品经销商咨询。

Easy for Use 便于您的使用



Multi-lingual menus and instruction manuals 多国语言菜单和使用说明书

Multi-lingual menus and instruction manuals are also available for Sony Overseas Models

索尼海外规格产品还会提供多国语言菜单和使用说明书

Sony Overseas Models product instructions come in various languages, such as English, Chinese, Korean, German, French, Spanish, Portuguese and Russian. (Available languages depend on the model) The menu display on the products of certain Handycam, Cyber-shot, etc. are able to display several languages besides English. (Available languages depend on the model)

索尼海外规格产品的使用说明书提供英语、中文、韩语、德语、法语、西班牙语、葡萄牙语和俄语等多种语言。(提供的语言取决于机型)部分Handycam数码相机、Cyber-shot数码相机等产品的菜单显示能够显示英语等多种语言。(提供的语言取决于机型)

*There is different of Pre-installed Language by Model. For the detail, Please check the catalog
多国语言菜单的预装语言数量根据产品不同而有所增减,详细请参照本册细节

Color system, Voltage & Frequency 彩色制式,电压与频率

Country / Region 国家/地区	Color system 彩色制式	Voltage 电压	Frequency 频率
Puerto Rico	NTSC	120V	60Hz
Chile	NTSC	220V	50Hz
Panama	NTSC	110/220V	60Hz
Venezuela	NTSC	120V	60Hz
Mexico	NTSC	120/127V	60Hz
Costa Rica	NTSC	110V	60Hz
Ecuador	NTSC	110V	60Hz
El Salvador	NTSC	110V	60Hz
Guatemala	NTSC	120V	60Hz
Honduras	NTSC	110V	60Hz
Nicaragua	NTSC	120/240V	60Hz
U.S.A.	NTSC	120V	60Hz
Canada	NTSC	120V	60Hz
U.A.E.	PAL	240V	50Hz
Qatar	PAL	240V	50Hz
Bahrain	PAL	220/240V	50/60Hz
Lebanon	SECAM	110/220V	50Hz
Tunisia	SECAM	220V	50Hz
South Africa	PAL	220/230V	50Hz
Singapore	PAL	230V	50Hz
Malaysia	PAL	240V	50Hz
Hong Kong	PAL	200/220V	50Hz
Korea	NTSC	220V	60Hz
Philippines	NTSC	220/230V	60Hz
Maldives	PAL	220-240V	50Hz
Thailand	PAL	220V	50Hz
Taiwan	NTSC	110V	60Hz
India	PAL	230/240V	50Hz
Indonesia	PAL	127/230V	50Hz
Japan	NTSC	100V	50/60Hz
China	PAL	220V	50Hz
Australia	PAL	240V	50Hz
New Zealand	PAL	230/240V	50Hz
Fiji	PAL	240V	50Hz
Tahiti	SECAM	220V	60Hz
New Caledonia	SECAM	220V	50Hz
Belgium	PAL	230V	50Hz
Switzerland	PAL	230V	50Hz
Germany	PAL	230V	50Hz
Denmark	PAL	230V	50Hz
Spain	PAL	127/230V	50Hz
Portugal	PAL	230V	50Hz
Austria	PAL	230V	50Hz
Greece	SECAM	220V	50Hz
France	SECAM	230V	50Hz
Finland	PAL	230V	50Hz
Italy	PAL	220V	50Hz
Norway	PAL	230V	50Hz
Netherlands	PAL	230V	50Hz
Sweden	PAL	230V	50Hz
U.K.	PAL	240V	50Hz
Russia	SECAM	220V	50Hz
Ukraine	SECAM	220V	50Hz

●The power supply situation and broadcasting system of each country may be changed without a preliminary announcement. You may obtain reconfirmation by yourself before purchase.
●每个国家的供电情况和广播系统均有可能在未事先通知的情况下发生变更。请在购买产品之前,自行重新确认。

INDEX

目录

P4 Digital Camcorder
数码摄像机

P7 Digital Recording Binoculars
摄录望远镜

P8 Interchangeable Lens Digital Camera
数码单反相机

P12 Digital Still Camera
数码相机

P14 Lens Style Camera
镜头型数码相机

P15 Recording Media
索尼存储卡

P15 Radio
收音机

P16 Walkman®
MP3播放器

P18 Headphones
耳机

P22 Wireless Speaker
无线扬声器

P23 IC Recorder
数码录音棒

P24 Specifications
规格表




Advancing to the next world of 4K recording 引领您进入4K拍摄的新时代

FDR-AXP35 / AX100E / X1000VR



Other camcorders typically support Full HD (1,920 x 1,080), but 4K camcorders support 4K (3,840 x 2,160), the extraordinary superior-definition format that delivers about four times the resolution of the Full HD format to capture incredible details that bring images to vibrant life.

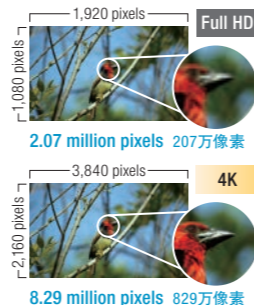


其他摄像机一般支持全高清(1,920×1,080),但4K摄像机支持4K(3,840×2,160)非凡清晰格式,以约4倍于全高清格式的分辨率,捕捉微小细节,呈现栩栩如生的影像。

Balanced Optical SteadyShot 平稳光学防抖



FDR-AXP35 / HDR-PJ670

By controlling the entire optical path including the image sensor as one floating unit, image stabilization is improved by as much as 13 times*1 compared to previous Image Stabilization technology. That applies to the full zoom range from wide to telephoto. Beautiful image quality with minimum blur is assured whether you're shooting scenery on vacation, or zooming in to catch an expression on a child's face.

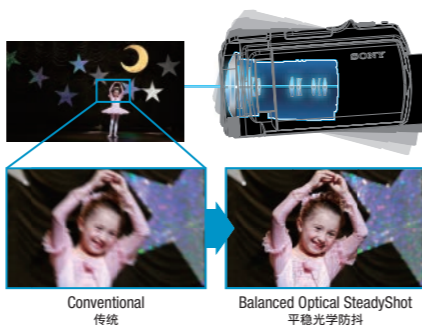

相对于原先的影像稳定技术,该技术通过将包括影像传感器在内的完整光路作为一个浮动单元来加以控制,影像稳定性提高了13倍*1之多。适用于广角到长焦的全程变焦范围。无论是拍摄度假美景还是放大捕捉儿童脸部表情,均能确保美丽的影像品质以及最低程度的模糊。

*1 Compared to standard mode of Optical SteadyShot model. The image stabilisation effect may vary depending on shooting conditions. 与光学防抖类型的标准模式相比,影像防抖效果可能因拍摄条件而异。

Flagship 4K Camcorder with 1.0 type Exmor R image sensor

具备1.0型Exmor R影像传感器的
旗舰版4K摄像机



FDR-AX100E(JE) Open Price

※Requires a recording media for shooting. 拍摄时需要记录媒体。

Still Image Size 20.0 Megapixels 2000万像素静态图像尺寸	Wide-angle 29.0mm 29.0mm广角焦距	Optical SteadyShot 光学防抖	Progressive Mode 50p (HD) / 25p / 24p (4K, HD) 逐行扫描模式
Optical Zoom 12x 12倍光学变焦	Clear Image Zoom Up to 18x (4K) / 24x (HD) 最高18倍(4K) / 24倍(HD)清晰影像变焦	5.1ch*3 / 2ch MIC 5.1 / 2声道麦克风	



*2 Movies and still images recorded with this camera can be output by TV that supports PAL System. 支持PAL制式的电视可输出本相机拍摄动态影像和静态图像。 *3 Video Mode is AVCHD. 视频模式为AVCHD格式。 *4 SDXC(micro SDXC) Class10 is required for XAVC S HD(50Mbps) and XAVC S 4K(60Mbps) recording. SDXC(micro SDXC) UHS-I U3 is required for XAVC S 4K(100Mbps) recording. 进行XAVC S HD(50Mbps)和XAVC S 4K(60Mbps)录制时需使用SDXC(micro SDXC) Class10,进行XAVC S 4K(100Mbps)录制时需使用SDXC(micro SDXC) UHS-I U3。 *5 Requires system software update (scheduled for 2015 March) 需进行系统软件更新(定于2015年3月) *6 ISO compatible. ISO兼容。

High-end 4K Camcorder with Balanced Optical SteadyShot and Built-in Projector with External Input

高端4K摄像机,具备平衡光学防抖功能,
具有外部输入接口的内置投影机



MADE IN JAPAN
日本制造(主机)

High-end Full HD Camcorder with 1.0 type Exmor R image sensor

具备1.0型Exmor R影像传感器
的高端全高清摄像机



MADE IN JAPAN
日本制造(主机)

35mm Interchangeable Lens Full-Frame Full HD Camcorder with Carl Zeiss standard zoom lens

35mm可更换镜头采用卡尔·蔡司标准
变焦镜头的全画幅全高清摄像机



MADE IN JAPAN
日本制造(主机)

Interchangeable Lens Full HD Camcorder with High-magnification power zoom lens

配备高倍电动变焦镜头的
可更换镜头全高清摄像机



MADE IN JAPAN
日本制造(主机)

FDR-AXP35(JE) Open Price Coming Soon

Still Image Size 20.6 Megapixels 2060万像素静态图像尺寸	Wide-angle 29.8mm 29.8mm广角焦距	Balanced Optical SteadyShot 平稳光学防抖	Progressive Mode 50p (HD) / 25p / 24p (4K, HD) 逐行扫描模式
Optical Zoom 10x 10倍光学变焦	Clear Image Zoom Up to 15x (4K) / 20x (HD) 最高15倍(4K) / 20倍(HD)清晰影像变焦	Internal Memory 64GB 64GB内存	Built-in Projector Up to 50 lumen 内置投影机高达50流明



HDR-CX900E(JE) Open Price

※Requires a recording media for shooting. 拍摄时需要记录媒体。

Still Image Size 20.0 Megapixels 2000万像素静态图像尺寸	Wide-angle 29.0mm 29.0mm广角焦距	Optical SteadyShot 光学防抖	Optical Zoom 12x 12倍光学变焦	Clear Image Zoom Up to 24x 最高24倍清晰影像变焦
Progressive Mode 50p/25p/24p 逐行扫描模式	5.1ch*3 / 2ch MIC 5.1 / 2声道麦克风			



NEX-VG900EH(JE) Open Price

JAPAN Limited KIT
日本限定套装

Kit lens: SAL2470Z Vario-Sonnar T* 24-70mm F2.8 ZA SSM

※Requires a recording media for shooting. 拍摄时需要记录媒体。

Still Image Size 24.3 Megapixels 2430万像素静态图像尺寸	Interchangeable Lens 可更换镜头	Come with* LA-EA3 adaptor 配备LA-EA3适配器	Progressive Mode 50p/25p/24p 逐行扫描模式	5.1ch / 2ch MIC 5.1 / 2声道麦克风
--	-------------------------------	--	---	---------------------------------

*When using LA-EA3 adaptor, Auto-focus doesn't operate during movie recording.



NEX-VG30EH(JE) Open Price

Kit lens: SELP18200 E PZ 18-200mm F3.5-6.3 OSS

※Requires a recording media for shooting. 拍摄时需要记录媒体。

Still Image Size 16.1 Megapixels 1610万像素静态图像尺寸	Interchangeable Lens 可更换镜头	Progressive Mode 50p/25p/24p 逐行扫描模式	5.1ch / 2ch MIC 5.1 / 2声道麦克风
--	-------------------------------	---	---------------------------------



Multilingual Menu Display 多语言菜单显示	English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / French / Italian / German / Spanish / Dutch / Russian / Portuguese / Greek / Thai / Polish / Czech / Hungarian / Arabic / Persian / Turkish / Romanian / Indonesian / Malay (FDR-AX100E / AXP35 / HDR-CX900E only)	Instruction Manual 使用说明书	English / Russian / Chinese (Simplified Chinese) 中文(简体中文)
--------------------------------------	---	-----------------------------	---

※Please refer to page 24,26 for product specifications and page 7 for accessories. 关于本产品的规格,请参阅第24,26页;配件请参阅第7页。
★Availability is limited to model in stock. ★For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. ★All insets contained here in are simulated pictures only. ★产品的供应因各型号产品库存情况而异。★如需了解关于"Open Price(价格未定)"产品的价格信息,请就近向索尼产品零售商家联系咨询。★此处包含的所有插图均为模拟图片,仅供参考。

Full HD Camcorder with Balanced Optical SteadyShot and Built-in Projector with External Input

全高清摄像机, 具备平衡光学防抖功能, 具有外部输入接口的内置投影机



MADE IN JAPAN
日本制造 (主机)

Entry Full HD Camcorder with Optical SteadyShot and Built-in Projector with External Input

入门级全高清摄像机, 具备光学防抖功能, 具有外部输入接口的内置投影机



MADE IN JAPAN
日本制造 (主机)

4K Action Cam with Live-View Remote kit

4K“酷拍”摄像机实时监控器套装



Supplied Accessories 随机配件



- A Live-View Remote (RM-LVR2) 实时监控器 (RM-LVR2)
- B Rechargeable Battery Pack (NP-BX1) 可重复充电电池 (NP-BX1)
- C Adhesive Mount (VCT-AM1) 粘性固定座 (VCT-AM1)
- D Micro USB Cable 微型USB电缆
- E Waterproof Case (SPK-X1) 防水套 (SPK-X1)

Action Cam with Live-View Remote kit

“酷拍”摄像机实时监控器套装



Supplied Accessories 随机配件



- A Live-View Remote (RM-LVR2) 实时监控器 (RM-LVR2)
- B Rechargeable Battery Pack (NP-BX1) 可重复充电电池 (NP-BX1)
- C Adhesive Mount (VCT-AM1) 粘性固定座 (VCT-AM1)
- D Micro USB Cable 微型USB电缆
- E Waterproof Case (SPK-AS2) 防水套 (SPK-AS2)
- F Tripod Adaptor*8 三脚架适配器

HDR-PJ670(JE)

Still Image Size 9.2 Megapixels 920万像素静态图像尺寸	Wide-angle 26.8mm 26.8mm广角焦距	Balanced Optical SteadyShot 平稳光学防抖	Optical Zoom 30x 30倍光学变焦	Clear Image Zoom Up to 60x 最高60倍清晰影像变焦
Progressive Mode 50p/25p 逐行扫描模式	Internal Memory 32GB 32GB内存	5.1ch*2 / 2ch MIC 5.1 / 2声道麦克风	Built-in Projector With External Input 具有外部输入接口的内置投影机	Light Output Up to 25 lumen 光输出高达25流明



HDR-PJ340E(JE)

Still Image Size 9.2 Megapixels 920万像素静态图像尺寸	Wide-angle 26.8mm 26.8mm广角焦距	Optical SteadyShot with Intelligent Active Mode 带有智能增强模式的光学防抖	Optical Zoom 30x 30倍光学变焦	Clear Image Zoom Up to 60x 最高60倍清晰影像变焦
Progressive Mode 50p 逐行扫描模式	Internal Memory 16GB 16GB内存	2ch MIC 2声道麦克风	Built-in Projector With External Input 具有外部输入接口的内置投影机	Light Output Up to 13 lumen 光输出高达13流明



FDR-X1000VR(CE35) Action Cam

Still Image Size 8.8 Megapixels 880万像素静态图像尺寸	Ultra Wide-angle 170° 170度超广角镜头	Advanced SteadyShot 增强防抖	100 / 60 / 50Mbps*3 High bit rate 100/60/50Mbps高比特率	High Speed REC Full HD120p / HD240p 高速录制 全高清120p/高清240p
--	---------------------------------------	-----------------------------	---	---



HDR-AS200VR(CE35) Action Cam

Still Image Size 8.8 Megapixels 880万像素静态图像尺寸	Ultra Wide-angle 170° 170度超广角镜头	Advanced SteadyShot 增强防抖	50 Mbps*3 High bit rate 50Mbps高比特率	High Speed REC HD120p / WGA240p 高速录制 高清120p/WGA240p
--	---------------------------------------	-----------------------------	--	---



Multilingual Menu Display 多语言菜单显示	HDR-PJ670 / PJ340E: English / Chinese (Simplified Chinese / Traditional Chinese) / French / Italian / German / Spanish / Dutch / Russian / Portuguese / Greek / Arabic / Persian / Thai / Turkish / Polish / Czech / Hungarian / Romanian / Indonesian / Malay	FDR-X1000VR / HDR-AS200VR: English / French / Brazilian Portuguese / Turkish	Instruction Manual 使用说明书	HDR-PJ670 / PJ340E: English / Russian / Chinese (Simplified Chinese)	FDR-X1000VR / HDR-AS200VR: English / Chinese (Traditional Chinese) / 中文 (繁体中文) / Korean / Arabic / Turkish
--------------------------------------	--	--	-----------------------------	--	--

Digital binoculars with HD video recording

可录制高清视频的摄录望远镜



MADE IN JAPAN
日本制造 (主机)

DEV-30(JE)

Still Image Size 20.4 Megapixels 2040万像素静态图像尺寸	Optical SteadyShot 光学防抖	Movie Mode 15x(2D) / 6x(3D) Magnification 动态影像模式15倍(2D)/6倍(3D)放大倍率	Photo Mode 15x Magnification 照片模式15倍放大倍率
Progressive Mode 60p/50p 逐行扫描模式	2ch MIC 2声道麦克风		



Multilingual Menu Display 多语言菜单显示	Japanese / English / Chinese (Simplified Chinese / Traditional Chinese) / 中文 (简体中文 / 繁体中文) / French / Canadian French / Italian / German / Spanish / Dutch / Russian / Portuguese / Brazilian Portuguese / Greek / Arabic / Persian / Thai / Korean / Turkish / Polish / Czech / Hungarian / Romanian / Indonesian / Malay	Instruction Manual 使用说明书	Japanese / English / Chinese (Simplified Chinese / Traditional Chinese) / 中文 (简体中文 / 繁体中文) / French / Italian / German / Spanish / Dutch / Russian / Portuguese / Korean / Arabic / Persian
--------------------------------------	--	-----------------------------	---

※Please refer to page 29 for product specifications. 关于本产品的规格, 请参阅第29页。

Digital Camcorder / Digital Recording Binoculars Accessories 数码摄像机 / 摄录望远镜配件

Rechargeable Battery Pack 可重复充电电池

NP-FV100(JE)

- ActiFORCE™
- Voltage 电压: 6.8V
- Capacity 容量: 25Wh (3,700mAh)
- Mass 重量: 195g

NP-FV70(JE)

- ActiFORCE™
- Voltage 电压: 6.8V
- Capacity 容量: 13Wh (1,960mAh)
- Mass 重量: 96g

NP-FV50(JE)

- ActiFORCE™
- Voltage 电压: 6.8V
- Capacity 容量: 6.6Wh (980mAh)
- Mass 重量: 51g

NP-BX1(JE)



- ActiFORCE™
- Voltage 电压: 3.6V
- Capacity 容量: 4.5Wh (1,240mAh)
- Mass 重量: 25g

※V series battery is compatible with H / P battery Handycam. V系列电池可兼容使用H / P系列电池的Handycam数码摄像机。

Portable Speaker 便携式扬声器

RDP-CA3M(JE)

- Dimensions (D x H) 尺寸 (深 x 高): 57 x 88 mm
- Mass 重量: 90g (only main body)
- Maximum output 最大输出功率: 2.5W
- Supplied Accessories 随机配件: Connector Protect Cap, Carrying Pouch

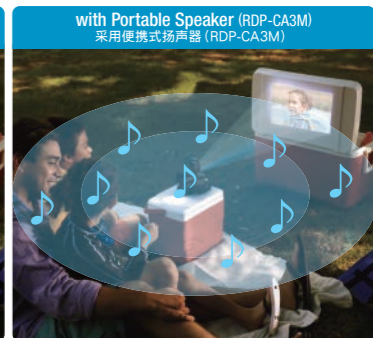

※Photo shown is image. 所示照片仅供参考。

Digital Camcorder / Digital Recording Binoculars Accessories compatibility 可兼容的数码摄像机 / 摄录望远镜配件

	Rechargeable Battery Pack 可重复充电电池				Portable Speaker 便携式扬声器
	NP-FV100(JE)	NP-FV70(JE)	NP-FV50(JE)	NP-BX1(JE)	RDP-CA3M(JE)
NEX-VG900EH / VG30EH	●	●	—	—	—
FDR-AX100E, HDR-CX900E	●	●	●	—	—
FDR-AXP35, HDR-PJ670	●	●	●	—	●
FDR-X1000VR, HDR-AS200VR	—	—	—	●	—
DEV-30	●	●	—	—	—

*1 Movies and still images recorded with this camera can be output by TV that supports PAL System. 支持PAL制式的电视可输出本相机拍摄动态影像和静态图像。
*2 Video Mode is AVCHD. 视频模式为AVCHD格式。
*3 SDXC(micro SDXC) Class10 is required for XAVC S HD(50Mbps) and XAVC S 4K(60Mbps) recording. SDXC(micro SDXC) UHS-I U3 is required for XAVC S HD(50Mbps) and XAVC S 4K(60Mbps) recording. 进行XAVC S HD(50Mbps)和XAVC S 4K(60Mbps)录制时需用SDXC(micro SDXC) Class10, 进行XAVC S 4K(100Mbps)录制时需用SDXC(micro SDXC) UHS-I U3。
*4 Movies and still images recorded with this camera can be output by TV that supports PAL or NTSC System. 支持PAL或NTSC制式的电视可输出本相机拍摄动态影像和静态图像。
*5 Only when used with Waterproof Case SPK-X1 (supplied). 仅当使用SPK-X1防水套(随机附件)时。
*6 When SteadyShot is OFF. 防抖功能关闭时。
*7 Only when used with Waterproof Case SPK-AS2 (supplied). 仅当使用SPK-AS2防水套(随机附件)时。
*8 Attach the supplied tripod adaptor directly to the camera body to connect other accessories. Then enjoy lightweight, compact camera use wherever action takes you. 直接将随机三脚架适配器安装于机身以连接其他配件。即可随时随地乐享使用轻量佩戴式摄像机拍摄的乐趣。
*9 IP tests are performed under our own test methods. 以本公司测试方法进行IP测试。关于防尘性能, 并不保证望远镜不会出现刮伤。
*10 IP tests are performed under our own test methods. As for dust-proof performance, there is no guarantee that the binoculars will not become scratched. 以本公司测试方法进行IP测试。关于防尘性能, 并不保证望远镜不会出现刮伤。
*Availability is limited to model in stock. ★For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. ★All insets contained here in are simulated pictures only. 产品的供应因各型号产品库存情况而异。★如需了解关于"Open Price(价格未定)"产品的价格信息, 请就近向索尼产品零售商家联系咨询。★此处包含的所有插图均为模拟图片, 仅供参考。



Interchangeable Lens Digital Camera 数码单电相机



The image sensor of larger size can make higher quality images


更大尺寸的影像传感器可实现更高质量的影像

SLT-A99, ILCE-7R / 7M2 / 7 / 6000 / 5100 / 5000 / 3000

3 advantages of larger image sensor 更大尺寸影像传感器的三大优势

- Stronger defocusing of background
背景虚化效果更强
- Wider angle of view
视角更宽广
- Higher sensitivity, lower noise
高感光度, 低噪点

	35mm Full-frame CMOS Sensor (SLT-A99, ILCE-7R / 7M2 / 7)	
	APS HD CMOS Sensor (ILCE-6000 / 5100 / 5000 / 3000)	approx. 2.3x 约2.3x
	1/2.3 type Image Sensor (DSC)	approx. 30x 约30x

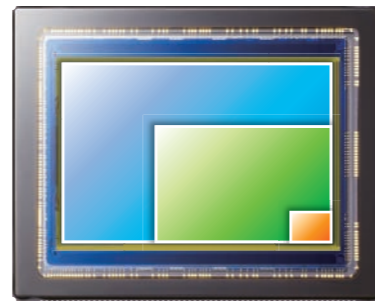


35mm Full-frame CMOS Sensor
[Actual size]
实际尺寸

Professional quality in your pocket 掌中专业品质

ILCE-6000 / 5100 / 5000

Sony E-mount cameras have the same size of the image sensor as conventional DSLR cameras. So the image quality is stunning despite the compact body.

索尼E卡口相机具备与传统数码单反相机相同尺寸的影像传感器。因此,即使机身小巧,也可实现惊人的影像品质。

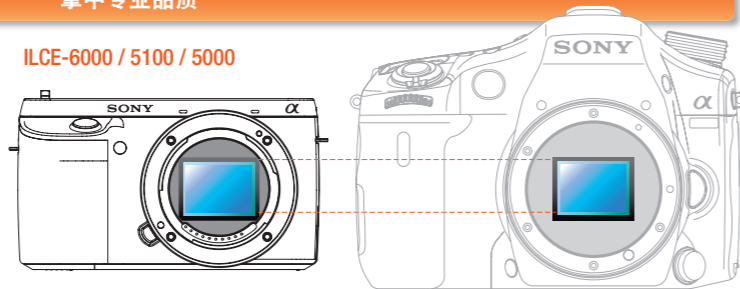

Exmor
CMOS Sensor

※ CMOS Sensor photo is an image. CMOS影像传感器是图像。


"4D FOCUS" captures your subject and doesn't let go "4D FOCUS"捕捉到拍摄主体就会紧跟不放

ILCE-6000 / 5100



In 1985, autofocus changed photography forever. Now 4D FOCUS will do the same. 3D gives you area and depth. To this Sony adds time. The state-of-the-art sensor detects both space and time to deliver the sharpest focus across four dimensions.

1985年,自动对焦永远改变了摄影。如今的4D FOCUS也会如此。3D技术给您带来了广度和深度。索尼在此基础上又增加了时间。最先进的传感器可同时检测空间和时间,实现最清晰的四维对焦。

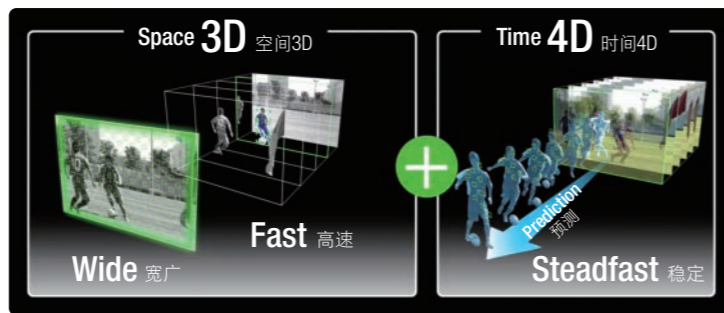

Interchangeable Lens Digital Camera

数码单电相机



Translucent Mirror Technology with Full size CMOS Sensor

采用全画幅CMOS影像传感器的半透镜技术



MADE IN JAPAN
日本制造(主机)

SLT-A99KIT(JE) Open Price

JAPAN Limited KIT
日本限定套装

24.3 Megapixels 2430万有效像素	35mm Full size Exmor CMOS Sensor 35mm全画幅 Exmor CMOS影像传感器	ISO 100-25600 ISO 100-25600	AVCHD Full HD Movie AVCHD格式全高清动态影像	Continuous shooting Up to 7fps 最高每秒7帧的连拍
Clear Image Zoom Up to 2X² 最高2倍清晰影像变焦	Sweep Panorama 扫描全景	1,228K dots TFT LCD 3.0 type		

Single lens kit
Kit lens: SAL2470Z Vario-Sonnar T* 24-70mm F2.8 ZA SSM
AF Point: 19 + 102 AF points including 11 cross sensors (TTL Phase-detection AF / Dual AF system)

World's smallest and lightest 35mm full-frame interchangeable-lens camera³

全球最轻便小巧的35mm全画幅微单相机³



³ As of October 16, 2013 according to Sony's internal survey. 截至2013年10月16日的索尼内部调查。

ILCE-7RKIT(JE) Open Price

JAPAN Limited KIT
日本限定套装

36.4 Megapixels 3640万有效像素	35mm Full size Exmor CMOS Sensor 35mm全画幅 Exmor CMOS影像传感器	ISO 100-25600 ISO 100-25600	AVCHD Full HD Movie AVCHD格式全高清动态影像	Continuous shooting Up to 4fps 最高每秒4帧的连拍
Clear Image Zoom Up to 2X 最高2倍清晰影像变焦	Wi-Fi / NFC Wi-Fi / NFC	921K dots TFT LCD 3.0 type		

Single lens kit
Kit lens: SEL2470Z Vario-Tessar T* FE 24-70mm F4 ZA OSS
AF Point: 25 points (Contrast-detection AF)

World's first⁴ full-frame camera with 5-axis image stabilization

全世界首款⁴5轴防抖全画幅相机



⁴ Among interchangeable-lens digital cameras equipped with a 35mm full-frame image sensor. As of November 2014 based on Sony research. 具备35mm全画幅影像传感器的数码相机当中,截至2014年11月,根据索尼调查的数据。

ILCE-7M2K(JE) Open Price NEW

24.3 Megapixels 2430万有效像素	35mm Full size Exmor CMOS Sensor 35mm全画幅 Exmor CMOS影像传感器	ISO 100-25600 ISO 100-25600	XAVC S⁵ / AVCHD Full HD Movie XAVC S / AVCHD格式全高清动态影像	Continuous shooting Up to 5fps 最高每秒5帧的连拍
Clear Image Zoom Up to 2X 最高2倍清晰影像变焦	Wi-Fi / NFC Wi-Fi / NFC	1,229K dots TFT LCD 3.0 type		

Single lens kit
Kit lens: SEL2870 FE 28-70mm F3.5-5.6 OSS
AF Point: 25 points (Contrast-detection AF) / 117 points (Phase-detection AF)

24.3-megapixel 35mm full-frame interchangeable-lens camera

2430万像素35mm全画幅微单相机



ILCE-7K(JE) Open Price

24.3 Megapixels 2430万有效像素	35mm Full size Exmor CMOS Sensor 35mm全画幅 Exmor CMOS影像传感器	ISO 100-25600 ISO 100-25600	AVCHD Full HD Movie AVCHD格式全高清动态影像	Continuous shooting Up to 5fps 最高每秒5帧的连拍
Clear Image Zoom Up to 2X 最高2倍清晰影像变焦	Wi-Fi / NFC Wi-Fi / NFC	921K dots TFT LCD 3.0 type		

Single lens kit
Kit lens: SEL2870 FE 28-70mm F3.5-5.6 OSS
AF Point: 25 points (Contrast-detection AF) / 117 points (Phase-detection AF)

Multilingual Menu Display
多语言菜单显示

English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Malay

Instruction Manual
使用说明书

English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Korean / Spanish / Portuguese

※Please refer to page 30-31 for product specifications and page 11 for accessories. 关于本产品的规格,请参阅第30-31页;配件请参阅第11页。

¹ Movies and still images recorded with this camera can be output by TV that supports PAL or NTSC System. 支持PAL或NTSC制式的电视可输出本相机拍摄动态影像和静态图像。² Still Image only. 仅限静态图像。

⁵ Requires SDXC Memory Card (Class10) 需要SDXC存储卡(Class10)

※Availability is limited to model in stock. ★For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. ★All insets contained here in are simulated pictures only. 产品的供应因各型号产品库存情况而异。★如需了解关于"Open Price(价格未定)"产品的价格信息,请就近向索尼产品零售商联系咨询。★此处包含的所有插图均为模拟图片,仅供参考。



World's fastest AF* And DSLR-style operation

全球最快的自动对焦* 数码单反相机形式的操作方式



*1 Among interchangeable-lens digital cameras equipped with an APS-C image sensor as of February 12, 2014, based on Sony research. Measured using CIPA internal measurement method with E PZ 16-50mm F3.5-5.6 OSS lens mounted, Pre-AF off and viewfinder in use. 具备APS-C影像传感器的数码单反相机当中, 截止至2014年2月12日, 根据索尼调查的数据, 根据相机影像器材工业协会内部测量方法, 使用E PZ 16-50mm F3.5-5.6 OSS镜头, 在使用取景器并且关闭预先自动对焦时。

ILCE-6000L(JE)
Open Price
※(B) Black Only 只提供黑色

ILCE-6000Y(JE)
Open Price

24.3 Megapixels 2430万有效像素	Exmor APS HD CMOS Sensor Exmor APS高清CMOS影像传感器	ISO 100-25600 ISO 100-25600	AVCHD Full HD Movie AVCHD格式全高清动态影像	Continuous shooting Up to 11fps 最高每秒11帧的连拍
Clear Image Zoom Up to 2X 最高2倍清晰影像变焦	Wi-Fi / NFC Wi-Fi / NFC	Sweep Panorama 扫描全景		

ILCE-6000L Single lens kit
Kit lens: E PZ 16-50mm F3.5-5.6 OSS
AF Point: 25 points (Contrast-detection AF) / 179 points (Phase-detection AF)

ILCE-6000Y Double lens kit
Kit lens: E PZ 16-50mm F3.5-5.6 OSS / E 55-210mm F4.5-6.3 OSS
AF Point: 25 points (Contrast-detection AF) / 179 points (Phase-detection AF)

Sublime AF performance and image quality with 180°Tiltable touch LCD screen

自动对焦性能与影像品质皆完美, 具备180°可翻转触控式液晶屏



180°Tiltable 3.0 type LCD screen for Self-portraits 适合自拍的180°可翻转3.0型液晶屏

ILCE-5100L(JE)
Open Price
※(B) Black and (W) White only 仅限黑色和白色款

ILCE-5100Y(JE)
Open Price

24.3 Megapixels 2430万有效像素	Exmor APS HD CMOS Sensor Exmor APS高清CMOS影像传感器	ISO 100-25600 ISO 100-25600	XAVC S*3 / AVCHD Full HD Movie XAVC S / AVCHD格式全高清动态影像	Continuous shooting Up to 6fps 最高每秒6帧的连拍
Clear Image Zoom Up to 2X 最高2倍清晰影像变焦	Wi-Fi / NFC Wi-Fi / NFC	Sweep Panorama 扫描全景		

ILCE-5100L Single lens kit
Kit lens: E PZ 16-50mm F3.5-5.6 OSS
AF Point: 25 points (Contrast-detection AF) / 179 points (Phase-detection AF)

ILCE-5100Y Double lens kit
Kit lens: E PZ 16-50mm F3.5-5.6 OSS / E 55-210mm F4.5-6.3 OSS
AF Point: 25 points (Contrast-detection AF) / 179 points (Phase-detection AF)

180°Tiltable monitor for Self portraits in compact body with 20.1M APS HD CMOS Sensor

采用2010万像素APS HD CMOS影像传感器的小巧机身具备方便自拍的180°可旋转屏幕



180°Tiltable 3.0 type LCD screen for Self portraits 适合自拍的180°可翻转3.0型液晶屏

ILCE-5000L(JE)
Open Price

20.1 Megapixels 2010万有效像素	Exmor APS HD CMOS Sensor Exmor APS高清CMOS影像传感器	ISO 100-16000 ISO 100-16000	AVCHD Full HD Movie AVCHD格式全高清动态影像	Continuous shooting Up to 3.5fps 最高每秒3.5帧的连拍
Clear Image Zoom Up to 2X 最高2倍清晰影像变焦	Wi-Fi / NFC Wi-Fi / NFC	Sweep Panorama 扫描全景		

Single lens kit
Kit lens: E PZ 16-50mm F3.5-5.6 OSS
AF Point: 25 points (Contrast-detection AF)

Multilingual Menu Display English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Malay

Instruction Manual English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Spanish / Portuguese

※Please refer to page 31 for product specifications and page 11 for accessories. 关于本产品的规格, 请参阅第31页; 配件请参阅第11页。

20.1M Exmor APS HD CMOS Sensor and ISO 16000 sensitivity

2010万像素 Exmor APS HD CMOS影像传感器和ISO 16000感光度



ILCE-3000K(JE)
Open Price

20.1 Megapixels 2010万有效像素	Exmor APS HD CMOS Sensor Exmor APS高清CMOS影像传感器	ISO 100-16000 ISO 100-16000	AVCHD Full HD Movie AVCHD格式全高清动态影像	Continuous shooting Up to 3.5fps 最高每秒3.5帧的连拍
Clear Image Zoom Up to 2X 最高2倍清晰影像变焦	Sweep Panorama 扫描全景			

Single lens kit
Kit lens: E 18-55mm F3.5-5.6 OSS
AF Point: 25 points (Contrast-detection AF)



Multilingual Menu Display English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Malay

Instruction Manual English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Spanish / Portuguese

※Please refer to page 31 for product specifications and page 11 for accessories. 关于本产品的规格, 请参阅第31页; 配件请参阅第11页。

Japan Limited Lens Kit of bright, high performance portrait lens and Versatile, lightweight 11x zoom lens

日本限定镜头套装包括高亮度、高性能人像镜头, 以及灵活且轻量的11倍变焦镜头



SELTPKIT(JE)
Open Price

JAPAN Limited KIT
日本限定套装

	Single focal length lens	Zoom lens
	E 50mm F1.8 OSS [SEL50F18]	E 18-200mm F3.5-6.3 OSS LE [SEL18200LE]
Optical SteadyShot 光学防抖	●	●
Supports Fast Hybrid AF 支持快速混合自动对焦	●	●
35mm equivalent focal length 35mm换算焦距距离	75mm	27-300mm
Lens configuration 镜头构成	8 groups, 9 elements 8组9片	13 groups, 17 elements 13组17片
Min. focus distance 最近对焦距离	0.39m	0.5m
Max. magnification ratio 最大放大倍率	0.16x	0.27x
Filter diameter 滤镜直径	49mm	62mm
Dimensions (max. dia. x length) 尺寸 (最大直径x长度)	62 x 62mm	68 x 97.1mm
Mass (Approx.) 重量 (约)	202g	460g
Supplied Accessories 随机配件	hood (ALC-SH116) 遮光罩 (ALC-SH116)	hood (ALC-SH124) 遮光罩 (ALC-SH124)

Instruction Manual English / French / Spanish / Italian / Portuguese / German / Dutch / Swedish / Russian / Korean / Arabic / Ukrainian / Japanese / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文)

Interchangeable Lens Digital Camera Accessories

数码单反相机配件

Rechargeable Battery Pack 可重复充电电池

<p>For A-mount Camera [SLT-A99]</p> <p>NP-FM500H(JE) Open Price</p> <p>InfoLITHIUM M</p> <ul style="list-style-type: none"> •Voltage 电压: 7.2V •Capacity 容量: 11.5Wh (1,600mAh) •Mass 重量: 78g 	<p>For E-mount Camera [ILCE-7R / ILCE-7M2 / ILCE-7 / ILCE-6000 / ILCE-5100 / ILCE-5000 / ILCE-3000]</p> <p>NP-FW50(JE) Open Price</p> <p>InfoLITHIUM W</p> <ul style="list-style-type: none"> •Voltage 电压: 7.2V •Capacity 容量: 7.3Wh (1,020mAh) •Mass 重量: 42g
---	--

*2 Movies and still images recorded with this camera can be output by TV that supports PAL or NTSC System. 支持PAL或NTSC制式的电视可输出本相机拍摄动态影像和静态图像。
*3 Requires SDXC Memory Card (Class10) 需要SDXC存储卡 (Class10)
*4 Movies and still images recorded with this camera can be output by TV that supports PAL System. 支持PAL制式的电视可输出本相机拍摄动态影像和静态图像。
*5 Still Image only. 仅限静态图像。
*Availability is limited to model in stock. *For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. *All insets contained here in are simulated pictures only. *产品的供应因各型号产品库存情况而异。*如需了解关于"Open Price(价格未定)"产品的价格信息, 请就近向索尼产品零售商联系咨询。*此处包含的所有插图均为模拟图片, 仅供参考。



Full Size CMOS Sensor without optical low-pass filter

全画幅CMOS影像传感器 无光学低通滤镜



MADE IN JAPAN 日本制造(主机)

DSC-RX1R(E32) Open Price

24.3 Megapixels 2430万有效像素	35mm Full size Exmor CMOS Sensor 35mm全画幅 Exmor CMOS影像传感器	F2.0 Carl Zeiss Lens F2.0蔡司镜头	Clear Image Zoom Up to 2x^{*2} 最高2倍清晰影像变焦	SteadyShot (EIS(blur reduction) for Movie) 电子防抖(动态影像)
AVCHD Full HD Movie AVCHD格式全高清动态影像	13 Picture Effect 13种照片效果	Superior Auto iA+ 增强自动	Sweep Panorama 扫描全景	Smile Shutter 笑脸快门

1,229K dots Xtra Fine TFT LCD

ZEISS Full HD 1080 FULL FRAME

Exmor CMOS Sensor BIONZ AVCHD Progressive

Multilingual Menu Display 多语言菜单显示
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Turkish / Malay

Instruction Manual 使用说明书
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Arabic / Persian

Ultra 50x zoom and Optical SteadyShot

50倍超高变焦和光学防抖



DSC-HX300(JE) Open Price

20.4 Megapixels 2040万有效像素	Exmor R CMOS Sensor Exmor R CMOS影像传感器	Optical Zoom 50x 50倍光学变焦	Clear Image Zoom Up to 100x^{*2} 最高100倍清晰影像变焦	Optical^{*5} SteadyShot 光学防抖
AVCHD Full HD Movie AVCHD格式全高清动态影像	9 Picture Effect 9种照片效果	Superior Auto iA+ 增强自动	360 Sweep Panorama 扫描全景	Smile Shutter 笑脸快门

921K dots Xtra Fine TFT LCD

ZEISS Full HD 1080 3D world Created by Sony

Exmor CMOS Sensor BIONZ AVCHD Progressive

Multilingual Menu Display 多语言菜单显示
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Malay / Indonesian / Vietnamese / Brazilian Portuguese

Instruction Manual 使用说明书
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Korean / Brazilian Portuguese / Spanish

Carl Zeiss lens with 1.0 type Exmor R back-illuminated CMOS Sensor

卡尔·蔡司镜头和1.0型Exmor R背面照射型CMOS影像传感器



DSC-RX100M3(E32) Open Price

20.1 Megapixels 2010万有效像素	1.0 type Exmor R CMOS Sensor 1.0型Exmor R CMOS影像传感器	Optical Zoom 2.9x 2.9倍光学变焦	Clear Image Zoom Up to 5.8x 最高5.8倍清晰影像变焦	Optical^{*5} SteadyShot 光学防抖
AVCHD Full HD Movie AVCHD格式全高清动态影像	13 Picture Effect 13种照片效果	Superior Auto iA+ 增强自动	Sweep Panorama 扫描全景	Smile Shutter 笑脸快门

Wi-Fi / NFC

ZEISS Wi-Fi CERTIFIED 4K Still Image Full HD 1080

XAVC S⁴ Exmor CMOS Sensor BIONZ X AVCHD Progressive

OLED Tru-Finder

1,229K dots Xtra Fine TFT LCD

Multilingual Menu Display 多语言菜单显示
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Turkish / Malay / Indonesian

Instruction Manual 使用说明书
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Arabic / Persian / Thai / Indonesian

20x zoom and Wi-Fi/NFC in compact body Capable of taking up to 470 photos

小巧机身具备20倍变焦和Wi-Fi/NFC, 可拍摄多达470张照片



DSC-WX350(JE) Open Price

18.2 Megapixels 1820万有效像素	Exmor R CMOS Sensor Exmor R CMOS影像传感器	Optical Zoom 20x 20倍光学变焦	Clear Image Zoom Up to 40x 最高40倍清晰影像变焦	Optical^{*5} SteadyShot 光学防抖
AVCHD Full HD Movie AVCHD格式全高清动态影像	13 Picture Effect 13种照片效果	Superior Auto iA+ 增强自动	360 Sweep Panorama 扫描全景	Smile Shutter 笑脸快门

Wi-Fi / NFC

ZEISS Wi-Fi CERTIFIED 4K Still Image Full HD 1080

Exmor CMOS Sensor BIONZ X AVCHD Progressive

460K dots Clear Photo LCD

Multilingual Menu Display 多语言菜单显示
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Malay / Indonesian / Vietnamese / Brazilian Portuguese / Turkish

Instruction Manual 使用说明书
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Brazilian Portuguese / Spanish

※Please refer to page 27 for product specifications and page 13 for accessories. 关于本产品的规格, 请参阅第27页; 配件请参阅第13页。

Carl Zeiss lens with 1.0 type CMOS Sensor 采用卡尔·蔡司镜头与1.0型CMOS影像传感器



DSC-RX100(JE) Open Price

20.2 Megapixels 2020万有效像素	1.0 type Exmor CMOS Sensor 1.0型Exmor CMOS影像传感器	Optical Zoom 3.6x 3.6倍光学变焦	Clear Image Zoom Up to 7.2x^{*2} 最高7.2倍清晰影像变焦	Optical^{*5} SteadyShot 光学防抖
AVCHD Full HD Movie AVCHD格式全高清动态影像	13 Picture Effect 13种照片效果	Superior Auto iA+ 增强自动	Sweep Panorama 扫描全景	Smile Shutter 笑脸快门

1,229K dots Xtra Fine TFT LCD

ZEISS Full HD 1080

Exmor CMOS Sensor BIONZ AVCHD Progressive

Multilingual Menu Display 多语言菜单显示
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / French / Korean / Portuguese / Spanish / Arabic / Persian / Thai / Malay

Instruction Manual 使用说明书
English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Korean / Spanish / Portuguese

※Please refer to page 27 for product specifications and page 13 for accessories. 关于本产品的规格, 请参阅第27页; 配件请参阅第13页。

Digital Still Camera / Lens Style Camera Accessories 数码相机 / 镜头型数码相机配件

Rechargeable Battery Pack 可重复充电电池	For DSC-RX1R / RX100M3 / RX100 / HX300 / WX350	For DSC-QX30 / QX10	For ILCE-QX1
NP-BX1(JE) Open Price		NP-BN1(JE) Open Price	NP-FW50(JE) Open Price
LITHIUM ION X	<ul style="list-style-type: none"> Voltage 电压: 3.6V Capacity 容量: 4.5Wh (1,240mAh) Mass 重量: 25g 	LITHIUM ION N	InfoLITHIUM W SERIES
		<ul style="list-style-type: none"> Voltage 电压: 3.6V Capacity 容量: 2.2Wh (600mAh) Mass 重量: 15g 	<ul style="list-style-type: none"> Voltage 电压: 7.2V Capacity 容量: 7.3Wh (1,020mAh) Mass 重量: 42g

^{*1} Movies and still images recorded with this camera can be output by TV that supports PAL or NTSC System. 支持PAL或NTSC制式的电视可输出本机拍摄动态影像和静态影像。
^{*2} Still Image only. 仅限静态影像。
^{*3} Depending on the shooting environment, there may be times when faces cannot be detected and the shutter does not function. Faces may be indistinguishable because of the shooting environment or individual subject traits. 由于拍摄环境的不同, 有时人脸未能被检测出来, 此时快门不起作用。因拍摄环境或拍摄主体的某些特性不同, 均有可能导致人脸未能被识别出来。
^{*4} Requires SDXC Memory Card (Class 10). 需要SDXC存储卡(Class 10)。
^{*5} The SteadyShot function may not work with excessive camera shake or extremely slow shutter speeds. 幅度过大的相机震动或反应过慢的快门速度均有可能使防抖功能失效。
^{*6} Movies and still images recorded with this camera can be output by TV that supports PAL System. 支持PAL制式的电视可输出本机拍摄动态影像和静态影像。

★For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. ★All insets contained here in are simulated pictures only. ★如需了解关于"Open Price(价格未定)"产品的价格信息, 请就近向索尼产品零售店联系咨询。★此处包含的所有插图均为模拟图片, 仅供参考。



Smartphone attachable lens-style camera

可换手机的数码相机

※Sony Tourist Products do not provide the phone case on the image picture. 索尼海外规格产品不销售在图片中使用的手机壳。

APS HD CMOS Sensor and E-mount lens creates high-quality images with interchangeable-lens camera style

可更换镜头形式的机身通过APS HD CMOS影像传感器和E卡口镜头创造高品质影像



E-Mount	PAL/NTSC	ILCE-QX1L(CE7)	Open Price		α
20.1 Megapixels	Exmor APS HD CMOS Sensor	ISO 100-16000	Full HD Movie MP4 / 30P	Continuous shooting Up to 3.5fps	
2010万有效像素	Exmor APS HD CMOS影像传感器	ISO 100-16000	全高清动态影像MP4/30P	最高每秒3.5帧的连拍	
Optical Zoom *1 Approx. 3x 约3倍光学变焦	Clear Image Zoom Up to Approx. 6x *1 最高约6倍清晰影像变焦	Optical *2/3 SteadyShot 光学防抖	Wi-Fi / NFC	Superior Auto iA+ 增强自动	

Exmor CMOS Sensor BIONZ X Wi-Fi CERTIFIED

Supplied lens
Kit lens: E PZ 16-50mm F3.5-5.6 OSS
AF Point: 25 points (Contrast-detection AF)

Battery monitor
电量显示屏

Capture and share far away object with 30x Optical Zoom / 60x Clear Image Zoom

通过30倍光学变焦和60倍清晰影像变焦, 捕捉并分享远处的景物



PAL/NTSC	DSC-QX30(CE7)	Open Price		Cyber-shot	
20.4 Megapixels	Exmor R CMOS Sensor	ISO 80-12800	Full HD Movie MP4 / 60P		Continuous shooting Up to 10fps
2040万有效像素	Exmor R CMOS影像传感器	ISO 80-12800	全高清动态影像MP4/60P	最高每秒10帧的连拍	
Optical Zoom 30x 30倍光学变焦	Clear Image Zoom Up to 60x 最高60倍清晰影像变焦	Optical *2 SteadyShot 光学防抖	Wi-Fi / NFC	Superior Auto iA+ 增强自动	

Exmor R CMOS Sensor BIONZ X Wi-Fi CERTIFIED

Battery monitor
电量显示屏

10x Optical Zoom & Optical SteadyShot with Compact Size

机身小巧, 具备10倍光学变焦和光学防抖



PAL/NTSC	DSC-QX10(CE7)	Open Price		Cyber-shot
18.2 Megapixels	Exmor R CMOS Sensor	ISO 100-12800	Full HD Movie MP4 / 30P *4	
1820万有效像素	Exmor R CMOS影像传感器	ISO 100-12800	全高清动态影像MP4/30P	
Optical Zoom 10x 10倍光学变焦	Optical SteadyShot *2 光学防抖	Wi-Fi / NFC	Superior Auto iA+ 增强自动	

Exmor R CMOS Sensor BIONZ X Wi-Fi CERTIFIED

Battery monitor
电量显示屏

Instruction Manual 使用说明书 English / French / Spanish / Italian / Portuguese / German / Dutch / Swedish / Russian / Korean / Arabic / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文)

※Sony Tourist Products do not provide the phone case on the DSC-QX10 image picture. 索尼海外规格产品不销售在图片中使用的手机壳。 ※Please refer to page 28 for product specifications. 关于本产品的规格, 请参阅第28页。

*1 When fitted with the SELP1650. Varies by lens. 安装SELP1650时, 因镜头而异。 *2 The SteadyShot function may not work with excessive camera shake or extremely slow shutter speeds. 幅度过大的相机震动或反应过慢的快门速度均有可能使防抖功能失效。 *3 Image stabilization supported on lens. 镜头支持影像防抖功能。 *4 Firmware update may be necessary. 有可能需要固件升级。

Memory Stick PRO Duo	SDXC UHS-I Memory Card(Class10)	SDHC UHS-I Memory Card(Class10)	SDHC Memory Card(Class4)	microSDXC UHS-I Memory Card(Class10)	microSDHC Memory Card(Class4)
4GB MS-MT4G(JE) Open Price	64GB SF-64UX2(ET4) Open Price	32GB SF-32UY(ET4) Open Price	32GB SF-32N4(JE) Open Price	64GB SR-64UXA(ET4) Open Price Coming Soon	32GB SR-32A4(ET4) Open Price
Memory Stick PRO-HG Duo HX		16GB SF-16UY(ET4) Open Price	16GB SF-16N4(JE) Open Price	64GB SR-64UYA(ET4) Open Price	16GB SR-16A4(JE) Open Price
8GB MS-HX8B(JE) Open Price		8GB SF-8UY(ET4) Open Price	8GB SF-8N4(JE) Open Price		8GB SR-8A4(JE) Open Price
			4GB SF-4N4(JE) Open Price		4GB SR-4A4(JE) Open Price

*5 UHS-I U3 (UHS Speed Class3)
※ Recording Media's warranty service covering 27 countries and regions. Australia / New Zealand / HongKong / Indonesia / India / Korea / Malaysia / Thailand / Philippine / Singapore / Taiwan / Vietnam / U.A.E. / Kuwait / Pakistan / Jordan / Egypt / Saudi Arabia / Tunisia / Algeria / Syria / Lebanon / Nigeria / Morocco / Iraq / Libya / South Africa ※索尼存储卡的保修服务遍布27个国家和地区。澳大利亚 / 新西兰 / 香港 / 印度尼西亚 / 印度 / 韩国 / 马来西亚 / 泰国 / 菲律宾 / 新加坡 / 台湾 / 越南 / 阿联酋 / 科威特 / 巴基斯坦 / 约旦 / 埃及 / 沙特阿拉伯 / 突尼斯 / 阿尔及利亚 / 叙利亚 / 黎巴嫩 / 尼日利亚 / 摩洛哥 / 伊拉克 / 利比亚 / 南非

Radio | 收音机

Card size radio [Traditional Japanese design] 卡片收音机 [传统日本设计]

Fit for gift 馈赠佳品

(L1) Namiura (W) Shinkansen (L) Mt.Fuji

MADE IN JAPAN 日本制造 (主机)

SRF-220(JE)
M.S.R.P. 6,000 yen plus tax

International shortwave broadcast receivable radio 可接收国际短波广播的收音机

MADE IN JAPAN 日本制造 (主机)

ICF-SW7600GR(JE)
M.S.R.P. 40,000 yen plus tax

Stereo

MADE IN JAPAN 日本制造 (主机)

ICF-SW35(JE)
M.S.R.P. 19,800 yen plus tax

Stereo

MADE IN JAPAN 日本制造 (主机)

ICF-SW22(JE)
M.S.R.P. 13,000 yen plus tax

Monaural

MADE IN JAPAN 日本制造 (主机)

ICF-SW11(JE)
M.S.R.P. 7,800 yen plus tax

Stereo

※Battery is Option. Please refer to page 30-31 for product specifications. ※不附电池。关于本产品的规格, 请参阅第30-31页。

Compact size radio 小型收音机

MADE IN JAPAN 日本制造 (主机)

SRF-T615(JE)
M.S.R.P. 9,400 yen plus tax

- FM stereo / AM / PLL synthesizer radio
- FM立体声/AM/PLL 合成器收音机

MADE IN JAPAN 日本制造 (主机)

SRF-M97(JE)
M.S.R.P. 7,800 yen plus tax

- MEGA BASS
- Clip (on back side) for carrying convenience
- 夹子位于背面携带更方便

MADE IN JAPAN 日本制造 (主机)

ICF-S84(JE)
M.S.R.P. 4,800 yen plus tax

- MEGA BASS
- Compact, cigarette-lighter-sized body
- 小巧的机身, 大小如同打火机

MADE IN JAPAN 日本制造 (主机)

ICF-T46(JE)
M.S.R.P. 4,500 yen plus tax

- Only 12.4mm slimness and slips easily into your breast pocket
- 仅12.4mm的纤薄机身, 可轻易置于胸袋内

Instruction Manual 使用说明书 ICF-SW22: English / Korean / Japanese Others: English / Chinese (Simplified Chinese) 中文 (简体中文) / Korean / Japanese


※Availability is limited to model in stock. ★For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. ★All insets contained here in are simulated pictures only. ※产品的供应因各型号产品库存情况而异。★如需了解关于"Open Price(价格未定)"产品的价格信息, 请就近向索尼产品零售商联系咨询。★此处包含的所有插图均为模拟图片, 仅供参考。

What is High-Res Audio

什么是高分辨率音频

High-Res Audio, which is typically referred to as "96kHz/24bit" or something higher, is made by digitally sampling an original analog audio source. So, Hi-Resolution Audio is the most same as original audio, and delivers you a new experience of music listening.

高分辨率音频通常指“96kHz/24bit”或更高的音频，通过对原始模拟音源进行数字采样制作。因此，高分辨率音频最接近原始音频，给您带来音乐欣赏的全新体验。

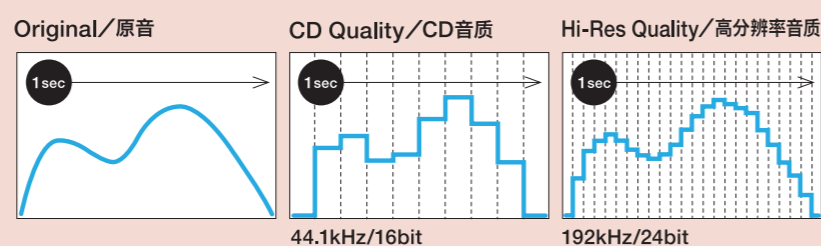

The product with this logo has been designed to maximize the sound performance of High Resolution Audio¹. 带有此标志的产品专为充分发挥高分辨率音频¹的声音表现力而设计。
¹ High-resolution audio generally refers to music data with a volume of information exceeding that of CDs. 高分辨率音频通常是指音乐数据信息量超过CD的音频。



Sony's High-Resolution Audio Technology 索尼高分辨率音频技术

S-MASTER HX

Hi-Res Audio Amplifier
Stunning realism that you've ever heard
前所未有的震撼临场感

DSEE HX


Digital Sound Enhancement Engine
Upscales your audio file sound quality
提升音频文件音质

ClearAudio+

Easy access to the best sound
轻松享受最佳音质

Enjoy the ultimate sound quality in Hi-Resolution Audio like you never experienced before

享受前所未有的超高音质
高清晰度音频

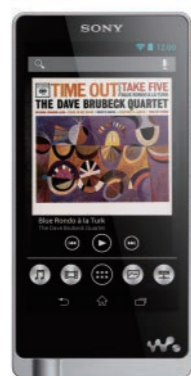

(S) Silver

NWZ-ZX1(E)

Open Price

Notice: There is no Headphone in the box.
注意：本产品不附耳机。

Built-in Memory 128GB 内置记忆体128GB	Max. Recordable Song [128 kbps] 20,000 number 最多可录制歌曲128kbps/20,000首	Max. Recordable Video [384 kbps] 466 h. 40 min. 最多可录制视频384kbps/466小时40分钟	Audio Formats MP3 / WMA / Linear PCM / AAC / HE-AAC / FLAC / Apple Lossless / AIFF 音频格式
Music 音乐 *2 Continuous Playback 32 h. 连续播放32小时	Video 视频 *3 Continuous Playback 5 h. 连续播放5小时	Operation System Android™ Version 4.1 Android™ 4.1版本	



Bluetooth® The Bluetooth® (Wireless) function is applicable in Hong Kong / Singapore / Thailand / Philippines / Korea / Taiwan / Vietnam / Malaysia / Australia

World's smallest and lightest⁴ Hi-Res Audio digital music player

世界最小最轻⁴高清晰度音频数字音乐播放器

⁴ As of September 3, 2014 local time. Dimensions: 43.6 x 109 x 8.7 mm (Width Length Thickness). Weight: approximately 66g

⁴ 截至2014年9月3日当地时间。体积：43.6 x 109 x 8.7 毫米（宽 x 高 x 厚）。重量：约66克



(B) Black

(S) Silver

NWZ-A15(E)

Open Price

Notice: There is no Headphone in the box.
注意：本产品不附耳机。

Built-in Memory 16GB 内置记忆体16GB	Max. Recordable Song [128 kbps] 3,600 number 最多可录制歌曲128kbps/3,600首	Max. Recordable Video [384 kbps] 49 h. 最多可录制视频384kbps/49小时	Audio Formats MP3 / WMA / Linear PCM / AAC / HE-AAC / Apple Lossless / AIFF 音频格式
Music 音乐 *2 Continuous Playback 50 h. 连续播放50小时	Video 视频 *3 Continuous Playback 14 h. 连续播放14小时	FM tuner 87.5 to 108.0MHz FM调谐器	



Bluetooth® The Bluetooth® (Wireless) function is applicable in Bahrain / Lebanon / Qatar / UAE / Indonesia / Malaysia/Maldives / Philippines / Singapore / Thailand/Hong Kong / Korea / Taiwan / Australia / Fiji / New Caledonia / New Zealand / Tahiti / South Africa

Recommended Headphones

推荐耳机



All the recommended headphones supports Hi-Resolution Audio 推荐耳机均支持高分辨率音频



Multilingual Menu Display
多语言菜单显示

NWZ-ZX1: German / English / Spanish / French / Italian / Polish / Portuguese / Russian / Turkish / Korean / Japanese / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / German / Italian / Polish / Turkish

NWZ-A15: English / French / Spanish / Russian / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Portuguese / German / Italian / Polish / Turkish

Instruction Manual
使用说明书

NWZ-ZX1 / A15: English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Arabic (NWZ-A15 only)

※Please refer to page 28 for product specifications. 关于本产品的规格，请参阅第28页。

More Comfortable Music Experience during Exercise

更舒适更舒适地在运动中享受音乐享受音乐



NWZ-WS613(E)

Open Price

Built-in Memory 4GB 内置记忆体4GB	Max. Recordable Song [128 kbps] 940 number 最多可录制歌曲128kbps/940首	Audio Formats WMA / AAC / MP3 / Linear PCM 音频格式
Music 音乐 *2 Continuous Playback 8 h. 连续播放8小时	3min. Quick Charge 3分钟快速充电	Water Resistance 防水



Bluetooth® The Bluetooth® (Wireless) function is applicable in Bahrain / Lebanon / Qatar / Hong Kong / Taiwan / Indonesia / Malaysia / Philippines / Singapore / Thailand / Australia

Enjoy music in the water

在水中欣赏音乐



NWZ-W273S(JE)

Open Price

Built-in Memory 4GB 内置记忆体4GB	Max. Recordable Song [128 kbps] 990 number 最多可录制歌曲128kbps/990首	Audio Formats MP3 / WMA / AAC-LC / Linear PCM 音频格式
Music 音乐 *2 *6 Continuous Playback 8 h. 连续播放8小时	3min. Quick Charge 3分钟快速充电	Water Resistance 防水

NWZ-W274S(JE)

Open Price ※(B)Black Only 只提供黑色

Built-in Memory 8GB 内置记忆体8GB	Max. Recordable Song [128 kbps] 1970 number 最多可录制歌曲128kbps/1970首	Audio Formats MP3 / WMA / AAC-LC / Linear PCM 音频格式
Music 音乐 *2 *6 Continuous Playback 8 h. 连续播放8小时	3min. Quick Charge 3分钟快速充电	Wearable Design 耐磨设计

NWZ-WS613, NWZ-W273S, NWZ-W274S Water Resistance 防水等级 IPX5 / IPX8 Applicable • fresh water, tap water, perspiration, pool water Not applicable • liquids other than those above 适用于 • 淡水、自来水、汗水、池水 不适用于 • 上述之外的其他液体 (例如：肥皂水、清洁剂水、含沐浴剂、洗发剂的水、温泉水、海水等)

MP3 player, Over head type Headphone, Personal speaker, 3-in-1 WALKMAN®

MP3播放器、头戴式耳机和个人音箱三合一的WALKMAN®




(W) White

(B) Black

Take your entertainment with you

音乐随你所动

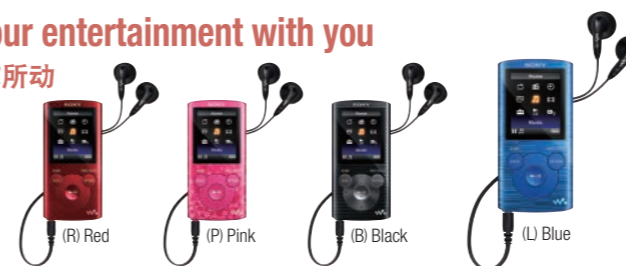

(R) Red

(P) Pink

(B) Black

(L) Blue

NWZ-E383(JE)

Open Price

Built-in Memory 4GB 内置记忆体4GB	Max. Recordable Song [128 kbps] 950 number 最多可录制歌曲128kbps/950首	Max. Recordable Video [384 kbps] 14 h. 20 min. 最多可录制视频384kbps/14小时20分钟	Audio Formats MP3 / WMA / AAC-LC / Linear PCM 音频格式
FM tuner 87.5 to 108.0MHz FM调谐器	Music 音乐 *2 Continuous Playback 30 h. 连续播放30小时	Video 视频 *3 Continuous Playback 4 h. 连续播放4小时	

You can enjoy powerful bass sound

可欣赏强劲的低音



(R) Red

(L) Blue

(P) Pink

(N) Gold

NWZ-B183F(JE)

Open Price

Built-in Memory 4GB 内置记忆体4GB	Max. Recordable Song [128 kbps] 890 number 最多可录制歌曲128kbps/890首	Audio Formats MP3 / WMA 音频格式
Music 音乐 *2 Continuous Playback 20 h. 连续播放20小时	FM tuner 87.5 to 108.0MHz FM调谐器	Built-in USB 内置USB

Multilingual Menu Display
多语言菜单显示

NWZ-E383: German / English / Spanish / French / Italian / Polish / Portuguese / Russian / Turkish / Korean / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Portuguese / German

NWZ-B183F: English / French / Spanish / Russian / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Portuguese / German

Instruction Manual
使用说明书

NWZ-WS613 / W273S / W274S / WH303 / E383 / B183F: English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Arabic / Korean (NWZ-WS613 / W273S / W274S / WH303 / B183F only)

※Please refer to page 28-29 for product specifications. 关于本产品的规格，请参阅第28-29页。

*2 When playing MP3 128kbps. 当播放MP3 128kbps时。 *3 When playing MPEG-4 384kbps. 当播放MPEG-4 384kbps时。 *5 Copyright protected files cannot be played back. 不会播放受著作权保护的文件。 *6 The time may differ depending on ambient temperature or the status of use. 时长会因周边温度或使用状态而异。 *7 In the built-in memory. 内置记忆体中。

XBA Series

XBA 系列



XBA-A3(E)

Open Price

Android iPad,iPod iPhone BlackBerry®

HD hybrid 3-way driver units Y type Closed L shaped stereo mini plug Serration Cord Detachable cord Call



- Sony's unique HD hybrid 3-Way driver unit (16mm dynamic driver unit and two balanced armature driver units) for music enjoyment over the entire frequency range.
- 索尼独创高清混合式三位驱动单元 (16mm动态驱动单元和2个动铁驱动单元) 给您带来全频率的音乐享受。



XBA-A2(E)

Open Price

Android iPad,iPod iPhone BlackBerry®

HD hybrid 3-way driver units Y type Closed L shaped stereo mini plug Serration Cord Detachable cord Call



- Sony's unique HD hybrid 3-Way driver unit (12mm dynamic driver unit and two balanced armature driver units) for music enjoyment over the entire frequency range.
- 索尼独创高清混合式三位驱动单元 (12mm动态驱动单元和2个动铁驱动单元) 给您带来全频率的音乐享受。



XBA-A1AP(E)

Open Price

Android iPad,iPod iPhone BlackBerry®

HD hybrid 2-way driver units Y type Closed L shaped stereo mini plug Serration Cord Call



- Sony's unique HD hybrid 2-Way driver unit (9mm dynamic driver unit and Balanced Armature driver unit) Delivers clear sound with bass sound.
- 索尼独创高清混合式双位驱动单元 (9mm动态驱动单元和1个动铁驱动单元) 使您聆听到具有低音的清澈声音。



XBA-100(E)

Open Price

Balanced Armature Driver Y type Closed L shaped stereo mini plug Serration Cord

- Crystal clear and profound vocal sound • 声音清澈浑厚



XBA-C10(JE)

Open Price

XBA-C10IP(JE)

Open Price

※(B) Black and (W) White only 仅限黑色和白色款

Made for iPod iPhone iPad

Balanced Armature Driver Y type Closed L shaped stereo mini plug Serration Cord Call Volume Control

- Smooth and clear vocal sound • 声音清晰流畅

Instruction Manual XBA-A3 / A2 / A1AP, MDR-AS800AP: English / Russian / Chinese (Traditional Chinese) / 中文 (繁体中文) / Korean / Ukrainian MDR-AS800BT: English / Russian / Chinese (Simplified Chinese, Traditional Chinese) / 中文 (简体中文 / 繁体中文) / Korean XBA-100 / C10 / C10IP, MDR-XB70AP / XB50AP / EX31BN / AS400EX / AS400IP / EX110LP / EX110AP / AS200 / EX15LP: English / Chinese (Traditional Chinese) / 中文 (繁体中文) / Korean

Inner Ear / Active Style Headphones

入耳式 / 运动式耳机



MDR-AS800BT(E)

Open Price

6mm driver units Y type Closed Serration Cord Water Resistant Call Volume Control USB Charging



- Light weight, splash proof (IPX4), wireless (Bluetooth®) headset
- Continuous battery life: Approx. 4.5h • Charging time: Approx. 2h
- 重量轻, 具备防水性能 (IPX4) 的无线 (Bluetooth®) 耳机
- 电池连续工作时间: 4.5小时 • 充电时间: 2小时

Bluetooth® The Bluetooth® (Wireless) function is applicable in Russia / Hong Kong / Australia / Taiwan / Korea / Singapore / Philippines / Lebanon / Qatar / Thailand



MDR-AS800AP(E)

Open Price

Android iPad,iPod iPhone BlackBerry®

12mm driver units Y type Closed L shaped stereo mini plug Serration Cord Water Resistant Call

- Light weight, water proof (IPX5/8)
- Recommended for fast movement and high-impact workouts
- 重量轻, 具备防水性能 (IPX5/8)
- 建议用于快速运动或高冲击性活动中



MDR-AS400EX(JE)

Open Price

MDR-AS400IP(JE)

Open Price ※(B) Black Only 只提供黑色

Made for iPod iPhone iPad

9mm driver units Y type Closed L shaped stereo mini plug Serration Cord Water Resistant Call Volume Control

- Recommended for fast movement and high-impact workouts
- 建议用于快速运动或高冲击性活动中




MDR-AS200(JE)

Open Price

13.5mm driver units Y type Open L shaped stereo mini plug Serration Cord Water Resistant

- The vertical and soft loop-hangers are great for intense workouts
- 直立的软环挂架非常适合于从事较为激烈的活动

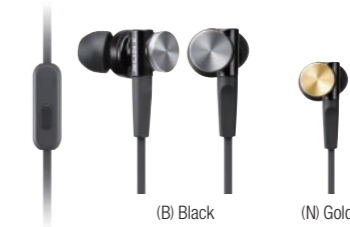

MDR-XB70AP(JE)

Open Price

Android iPad,iPod iPhone BlackBerry®

12mm driver units Y type Closed L shaped stereo mini plug Serration Cord Call

- Powerful Bass Sound with Bass Boost • Aluminum Housings • In-line microphone for hands-free phone calls
- 低音增强带来强劲低音 • 铝合金外壳 • 带有有线麦克风, 适合免提通话



MDR-XB50AP(JE)

Open Price

Android iPad,iPod iPhone BlackBerry®

12mm driver units Y type Closed L shaped stereo mini plug Serration Cord Call

- Powerful Bass Sound with Bass Boost • In-line microphone for hands-free phone calls
- 低音增强带来强劲低音 • 带有有线麦克风, 适合免提通话



MDR-EX31BN(JE)

Open Price

Wireless Stereo Noise canceling Headset 13.5mm driver units Closed Call Bluetooth® Digital

- Hand-free set Function*3 • Reduce up to 98% ambient noise
- Removable earphone • Music controller*4
- 手机免提功能*3 • 最高降低98%环境噪音 • 可拆卸耳机 • 配有音乐控制键*4

Bluetooth® The Bluetooth® (Wireless) function is applicable in Hong Kong / Korea



MDR-EX110LP(JE)

Open Price

MDR-EX110AP(JE)

Open Price

Android iPad,iPod iPhone BlackBerry®

9mm driver units Y type Closed L shaped stereo mini plug Serration Cord Call

- Enjoy, high-resolution treble and midrange with powerful bass sound
- 欣赏高分辨率的高音和中音以及强劲的低音



MDR-EX15LP(JE)

Open Price

9mm driver units Y type Closed L shaped stereo mini plug Serration Cord

- Hybrid silicone earbuds supplied for secure fitting and long-term wearing comfort
- 配有混合硅胶耳塞确保长时间稳固舒适佩戴

※Please refer to page 29 for product specifications. 关于本产品的规格, 请参阅第29页。

★For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. ★如需了解关于"Open Price(价格未定)"产品的价格信息, 请就近向索尼产品零售商联系咨询。

Sony High Quality Sound Headphones

索尼高品质耳机



MDR-Z7(E)

Open Price

70mm HD driver units Closed Balance connection



MADE IN JAPAN
日本制造(主机)

Premium quality headband-type headphones, adopt a new 70mm HD driver unit for faithful sound reproduction in High-Resolution audio. A new evolution in audio quality is realized by full range reproduction from low frequencies to ultrahigh 100kHz frequencies.

高品质头戴式耳机采用新型70mm高清驱动单元,以高分辨率音频忠实再现声音。通过再现从低频到100kHz特高频的全频段范围,给音频品质带来了新的演进。



MDR-1ADAC(E)

Open Price

40mm HD driver units Closed Swivel Built-in Amplifier



S-Master HX
Hi-Res Audio Amplifier

Built-in Amplifier upgrades all the sound input from any digital music player. Continuous battery life: Approx.7.5hours. Charging time: Approx.4hours. 内置功率放大器可提升从任何数码音乐播放器传输过来的所有声音的音质。电池连续工作时间:约7.5小时。充电时间:约4小时。

MDR-1RNCMK2(JE)

Open Price

50mm driver units Closed L shaped stereo mini plug Swivel



DIGITAL NOISE CANCELING

Reduces up to 99.7%^{*1} Ambient noise
最高降低99.7%环境噪声

Dual Noise Sensor Technology uses dual microphones to block out external noise, while you enjoy unparalleled sound quality in comfort. Continuous battery life: Approx.22hours. 双噪声传感器技术采用两个麦克风消除外部噪音,让您舒适地尽情欣赏无以伦比的音质。电池连续工作时间:约22小时。



MDR-1RBTMK2(JE)

Open Price

Wireless Stereo Headset 40mm HD driver units Closed L shaped stereo mini plug Swivel Serration Cord Call USB Charging



Bluetooth

One Touch Connect (NFC) S-Master Digital Amplifier Continuous battery life: Approx.30Hours Charging time: Approx.6hours. 一触连接(NFC)功能 S-Master数码功放 电池连续工作时间:约30小时 充电时间:约6小时



Bluetooth The Bluetooth® (Wireless) function is applicable in Philippines / Singapore / Hong Kong / Korea / New Zealand



MDR-1A(E)

Open Price

40mm HD driver units Closed L shaped stereo mini plug Swivel Serration Cord Call



Hi-Res Audio

Adopt a new 40mm HD driver unit for faithful sound reproduction as mastering Studio. 采用新型40mm高清驱动单元,忠实再现母带录音室般的声音。


Hi-Res Audio



MDR-10RNC(JE)

Open Price

40mm driver units Closed L shaped stereo mini plug Swivel Serration Cord Call



DIGITAL NOISE CANCELING

Reduces up to 99.4%^{*1} Ambient noise
最高降低99.4%环境噪声

Sony's unique DNC software engine with Dual Noise Sensor Technology. S-Master Digital Amplifier. Continuous battery life: Approx.20hours. 索尼独特的采用双噪声传感器技术的DNC(数字降噪)软件引擎 S-Master数码功放 电池连续工作时间:约20小时



MDR-10RBT(JE)

Open Price

Wireless Stereo Headset 40mm HD driver units Closed L shaped stereo mini plug Swivel Serration Cord Call USB Charging



Bluetooth

One Touch Connect (NFC) Continuous battery life: MAX.17Hours Charging time: Approx.2.5hours. 一触连接(NFC)功能 电池连续工作时间:最大17小时 充电时间:约2.5小时


Bluetooth The Bluetooth® (Wireless) function is applicable in Singapore / Hong Kong / Australia / New Zealand / Philippines / Korea / Oman / Kenya / Nigeria



MDR-10RC(JE)

Open Price

40mm driver units Closed L shaped stereo mini plug Serration Cord Foldable Call



Hi-Res Audio

40mm drive units with Hi-Resolution Audio correspondence. Lightweight for long listening comfort. Foldable design for easy carrying. 40毫米驱动单元对应高分辨率音频播放 轻量设计,佩戴舒适,适合长时间使用 可折叠机身,便于携带

Over Head Band

头戴式



MDR-XB950BT(E)

Open Price

40mm driver units Closed L shaped stereo mini plug Swivel Serration Cord Call USB Charging



Delivers an overwhelming deep bass in a simple wireless design. One Touch Connect (NFC). Continuous battery life: Approx.20hours. Charging time: Approx.4hours. 采用简便的无线设计,可播放富有震撼力的重低音。一触连接(NFC)功能 电池连续工作时间:约20小时 充电时间:约4小时

Bluetooth


The Bluetooth® (Wireless) function is applicable in Belarus / Russia / Ukraine / Lebanon / Qatar / Singapore / Thailand / Hong Kong / Korea / Taiwan / Australia / New Zealand



MDR-XB950AP(E)

Open Price

40mm driver units Closed L shaped stereo mini plug Swivel Serration Cord Call



Delivers a formidable deep bass. In-line microphone for hands-free phone calls. 可播放气势恢宏的重低音。带有线控麦克风,适合免提通话。



MDR-XB450BV(E)

Open Price

30mm driver units Closed L shaped stereo mini plug Swivel Serration Cord



Delivers a resonating deep bass. Continuous battery life: Approx.60hours (1kHz 0.1mW+0.1mW output). 可播放具有临场感的重低音。电池连续工作时间:约60小时(1kHz 0.1mW+0.1mW output)

Battery sold separately (Dry Battery: Size AAA x 2)


可播放具有临场感的重低音。电池连续工作时间:约60小时(1kHz 0.1mW+0.1mW output)



MDR-XB450AP(E)

Open Price

30mm driver units Closed L shaped stereo mini plug Swivel Serration Cord Call



Deep lows with Advanced Vibe Structure. In-line microphone for hands-free phone calls. 采用高级振动结构,产生深沉的低音。带有线控麦克风,适合免提通话。

采用高级振动结构,产生深沉的低音。带有线控麦克风,适合免提通话。



MDR-XB250(E)

Open Price

30mm driver units Closed L shaped stereo mini plug Swivel Serration Cord



Hear rich, balanced bass for all music styles. Deep lows with Advanced Vibe Structure. 聆听丰富的、均衡的低音,适合所有音乐风格。采用高级振动结构,产生深沉的低音。

聆听丰富的、均衡的低音,适合所有音乐风格。采用高级振动结构,产生深沉的低音。



MDR-ZX750BN(JE)

Open Price

Wireless Stereo Headset 40mm driver units Closed L shaped stereo mini plug Digital Noise Canceling Swivel Serration Cord Call USB Charging



Reduces up to 98%^{*1} Ambient noise
最高降低98%环境噪声

Delivers an overwhelming deep bass in a simple wireless design. Continuous battery life: NC on 13Hours NC off 19Hours. Charging time: Approx.2.5hours. 采用简便的无线设计,可播放富有震撼力的重低音。电池连续工作时间:使用降噪功能时13小时 关闭降噪功能时19小时 充电时间:约2.5小时

采用简便的无线设计,可播放富有震撼力的重低音。电池连续工作时间:使用降噪功能时13小时 关闭降噪功能时19小时 充电时间:约2.5小时

Bluetooth The Bluetooth® (Wireless) function is applicable in Singapore / Hong Kong / Australia / New Zealand

Bluetooth DIGITAL NOISE CANCELING



MDR-ZX310(JE)

Open Price

30mm driver units Closed L shaped stereo mini plug Quick Folding Call



High quality and powerful sound. Enjoy clear mid and deep bass. 高品质强劲声音。欣赏清晰的中音和深沉的低音。


高品质强劲声音。欣赏清晰的中音和深沉的低音。



MDR-ZX110NC(JE)

Open Price

30mm driver units Closed L shaped stereo mini plug Quick Folding



Reduces up to 95%^{*1} Ambient noise
最高降低95%环境噪声

Easy to carry with the ability to reduce unwanted ambient noise. Continuous battery life: Approx.80hours. 便于携带,可降低多余的环境噪声。电池连续工作时间:约80小时。

便于携带,可降低多余的环境噪声。电池连续工作时间:约80小时。



MDR-ZX110(JE)

Open Price

30mm driver units Closed L shaped stereo mini plug Quick Folding



High quality and powerful sound. Lightweight for maximum comfort. Easily connect to your music player. 高品质强劲声音。重量轻,配戴极为舒适。可轻松连接音乐播放器。


高品质强劲声音。重量轻,配戴极为舒适。可轻松连接音乐播放器。



MDR-S40(JE)

Open Price

30mm driver units Open L shaped stereo mini plug Foldable Serration Cord



Hybrid head band for wearing comfort. Slim & foldable. Breathable ear pads for long lasting wearing comfort. 配戴舒适的混合材料头带。纤细、可折叠。具透气性耳垫,可长时间舒适配戴。

配戴舒适的混合材料头带。纤细、可折叠。具透气性耳垫,可长时间舒适配戴。

Instruction Manual MDR-Z7 / 1A / 1ADAC: English / Russian / Chinese (Traditional Chinese) 中文(繁体中文) / Korean / Ukrainian MDR-10RBT / 10RC: English / Chinese (Traditional Chinese) 中文(繁体中文) / Korean MDR-10RNC / 1RNCMK2: English / Japanese MDR-1RBTMK2: English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Korean

*Please refer to page 29 for product specifications. 关于本产品的规格,请参阅第29页。

*1 Under the Sony measurement standard. The noise canceling effect may not be pronounced in a very quiet environment, or some noise may be heard. Ambient noise is not reduced to zero. 根据索尼测试标准,在非常安静的环境中,降噪功能的效果也许并不显著,或者有可能听到某些噪音。环境噪音不会被降低至零。 *2 MDR-ZX310AP only 仅限MDR-ZX310AP

Instruction Manual MDR-XB950BT / XB950AP / XB450AP / XB250: English / Russian / Ukrainian / Chinese (Traditional Chinese) 中文(繁体中文) / Korean MDR-ZX750BN / ZX310 / ZX310AP / ZX110: English / Chinese (Traditional Chinese) 中文(繁体中文) / Korean MDR-XB450BV / ZX110NC: English / Japanese / Chinese (Traditional Chinese) 中文(繁体中文) / Korean MDR-S40: English / Chinese (Simplified Chinese / Traditional Chinese) 中文(简体中文 / 繁体中文) / Korean

*Please refer to page 29 for product specifications. 关于本产品的规格,请参阅第29页。

*Availability is limited to model in stock. *For information about the prices of "Open Price" products, please contact your nearest Sony product retailer. 产品的供应因各型号产品库存情况而异。*如需了解关于"Open Price(价格未定)"产品的价格信息,请就近向索尼产品零售商进行咨询。



Bass Sound for Compact Size 小巧机身再现重低音



(W) White

(B) Black

(R) Red

Tap to link with "NFC"
具备"NFC"功能,点触即可连接

SRS-X3(JE)

Open Price

ClearAudio+ Bluetooth

Power output 20w 输出功率20W	Max. Playback Time 7Hrs 最长播放时间7小时	Bluetooth® (Wireless)function Bluetooth® (无线)功能	Easy Portability 易于携带	USB Charging USB 充电
Hands free 免提	Bluetooth® function designed for this product is applicable in Bahrain / Hong Kong / Indonesia / Lebanon / Malaysia / Philippines / Qatar / Singapore / South Africa / Taiwan / Tunisia / UAE			



Water Proof Wireless Mobile Speaker 防水无线便携式扬声器



(W) White

(V) Purple

(B) Black

Tap to link with "NFC"
具备"NFC"功能,点触即可连接

SRS-X1(E)

Open Price

Bluetooth

Power output 5w 输出功率5W	Max. Playback Time 12Hrs 最长播放时间12小时	Bluetooth® (Wireless)function Bluetooth® (无线)功能	Water Resistance 防水	Easy Portability 易于携带
USB Charging USB 充电	Hands free 免提	Bluetooth® function designed for this product is applicable in Hong Kong / Korea / Thailand / Fiji / Malaysia / Philippines / Singapore / Taiwan		

SRS-X1 **Water Resistance** 防水 **Applicable** • fresh water, tap water, perspiration, pool water **Not applicable** • liquids other than those above (examples: soapy water, detergent water, water with bath agents, shampoo, hot spring water, seawater, etc.) 适用于 • 淡水、自来水、汗水、池水 不适用于 • 上述之外的其他液体 (例如: 肥皂水、清洁剂水、含沐浴剂、洗发精的水、温泉水、海水等)

Wireless Mobile Speaker 无限便携式扬声器



(W) White

(L) Blue

(P) Vivid Pink

(B) Black

Tap to link with "NFC"
具备"NFC"功能,点触即可连接

SRS-BTV5(JE)

Open Price

Bluetooth

Max. Playback Time 5Hrs 最长播放时间5小时	Bluetooth® (Wireless)function Bluetooth® (无线)功能	360° Circle Sound Technology 360° 环形声音技术	Easy Portability 易于携带	USB Charging USB 充电
Hands free 免提	Bluetooth® function designed for this product is applicable in India / Hong Kong / Australia / New Zealand / Algeria / Angola / Egypt / Ethiopia / Kenya / Morocco / Nigeria / Tanzania / Tunisia / Bahrain / Jordan / Kuwait / Lebanon / Oman / Pakistan / Qatar / Saudi Arabia / Syria / UAE / Yemen / Korea / Thailand / South Africa / Indonesia / Malaysia / Philippines / Singapore / Taiwan / Vietnam			

Instruction Manual 使用说明书 **SRS-X3:** English / Arabic / Chinese (Traditional Chinese) 中文 (繁体中文)

SRS-X1 / BTV5: English / Chinese (Traditional Chinese) 中文 (繁体中文) / Korean / Thai



(B) Black



(R) Red

ICD-SX1000(JE)

Open Price

Stereo Recording

Built-in Memory 16GB 内置记忆体16GB	Max. Recording Time MP3 48kbps 636Hrs 最长录音时间 (MP3 48kbps) 636小时	Recording Formats Linear PCM/MP3 录音格式
Direct USB USB 直连		

- 3 Directional Microphones (Zoom/Stereo)
- 96kHz/24bit Over CD Quality Recording
- 192kHz/24bit High Definition Playback
- 3个定向麦克风 (变焦/立体声)
- 96kHz/24bit超CD品质录音
- 192kHz/24bit高清晰播放



ICD-TX650(E)

Open Price

Stereo Recording

Built-in Memory 16GB 内置记忆体16GB	Max. Recording Time MP3 48kbps 715Hrs 最长录音时间 (MP3 48kbps) 715小时	Recording Formats Linear PCM/MP3 录音格式
---	--	---

- Easy to read Bright Organic EL Display
- Stylish Thin & Clip Style Design
- Easy Recording Setting with Scene Select Function
- 易于阅读的明亮有机EL显示屏
- 时尚轻薄的背夹式设计
- 简易录制设定, 具备场景选择功能



ICD-SX734(JE)

Open Price

Stereo Recording

Built-in Memory 8GB 内置记忆体8GB	Max. Recording Time MP3 48kbps 318Hrs 最长录音时间 (MP3 48kbps) 318小时	Recording Formats Linear PCM/MP3 录音格式
Direct USB USB 直连		

- 3 Directional Microphones (Zoom/Stereo)
- Linear PCM (CD Quality) Recording
- 3个定向麦克风 (变焦/立体声)
- 线性PCM (CD品质) 录音



(B) Black

(S) Silver

ICD-UX543F(JE)

Open Price

Stereo Recording

Built-in Memory 4GB 内置记忆体4GB	Max. Recording Time MP3 8kbps 1073Hrs 最长录音时间 (MP3 8kbps) 1073小时	Recording Formats Linear PCM/MP3 录音格式
Direct USB USB 直连		

- All-in-1 Recording with Direct USB
- High Sensitivity and Low Noise
- OLED Display
- 采用直连USB的一体化数码录音棒
- 高敏感度, 低噪音
- OLED有机发光显示屏



ICD-BX140(JE)

Open Price

Monaural Recording

Built-in Memory 4GB 内置记忆体4GB	Max. Recording Time HVXC 2kbps 4175Hrs 最长录音时间 (HVXC 2kbps) 4175小时	Recording Formats HVXC/MP3 录音格式
---	--	---------------------------------------

- Noise Cut Function
- Easy and Large Buttons
- 降噪功能
- 大按钮易于使用








Multilingual Menu Display 多语言菜单显示	ICD-SX1000 / SX734 / TX650 / UX543F: English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Thai / Spanish / French / German / Italian / Russian	ICD-BX140: English
Instruction Manual 使用说明书	ICD-SX1000 / SX734 / TX650: English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Korean / Arabic / Persian	ICD-UX543F / BX140: English / Chinese (Simplified Chinese / Traditional Chinese) 中文 (简体中文 / 繁体中文) / Arabic / Persian

*Please refer to page 31 for rec time. 关于拍摄时间, 请参阅第31页。

*Availability is limited to model in stock. ★For information about the prices of "Open Price" products, please contact your nearest Sony product retailer.

★产品的供应因各型号产品库存情况而异。★如需了解关于"Open Price(价格未定)"产品的价格信息, 请就近向索尼产品零售商家联系咨询。



Digital Camcorder Specifications 数码摄像机规格

Model Name 机型名称		FDR-AX100E(JE)  P4	FDR-AXP35(JE)  P5	HDR-CX900E(JE)  P5	HDR-PJ670(JE)  P6	HDR-PJ340E(JE)  P6	FDR-X1000VR(CE35)  P6	HDR-AS200VR(CE35)  P6					
		4K [3,840 x 2,160]		High-Definition [1,920 x 1,080]		High-Definition [1,920 x 1,080]		4K [3,840 x 2,160]		High-Definition [1,920 x 1,080]			
Image Sensor 影像传感器		1.0 type Exmor R CMOS Sensor		1/2.3 type Exmor R CMOS Sensor		1.0 type Exmor R CMOS Sensor		1/5.8 type Exmor R CMOS Sensor		1/2.3 type Exmor R CMOS Sensor			
Still Image Max Effective 最大静态图像像素		20.0 Megapixels		20.6 Megapixels		20.0 Megapixels		9.2 Megapixels		8.8 Megapixels			
Gross pixels (Approx.) 总像素 (约)		20.9 Megapixels		18.9 Megapixels		20.9 Megapixels		2.51 Megapixels		12.8 Megapixels			
Effective pixels of moving pictures (Approx.) 动态影像有效像素 (约)		14.2 Megapixels (16:9)*1		8.29 Megapixels (16:9)*1		14.2 Megapixels (16:9)*1		2.29 Megapixels (16:9)*1		8.8 Megapixels (16:9)			
Effective pixels of still images (Approx.) 静态影像有效像素 (约)		14.2 Megapixels (16:9) / 10.6 Megapixels (4:3)		10.3 Megapixels (16:9) / 7.74 Megapixels (4:3)		14.2 Megapixels (16:9) / 10.6 Megapixels (4:3)		2.29 Megapixels (16:9) / 1.71 Megapixels (4:3)		8.8 Megapixels (16:9)			
Lens 镜头		ZEISS Vario-Sonnar T*		ZEISS Vario-Sonnar T*		ZEISS Vario-Sonnar T*		G Lens		ZEISS Tessar			
Zoom 变焦		Optical 12x (Digital 160x*2), Clear Image 18x (4K) / 24x (HD)		Optical 10x (Digital 120x*2), Clear Image 15x (4K) / 20x (HD)		Optical 12x (Digital 160x*2), Clear Image 24x		Optical 30x (Digital 350x*2), Clear Image 60x		Optical 30x (Digital 350x*2), Clear Image 60x			
AF Modes 自动对焦模式		Auto / Manual (Touch Panel / Dial)		Auto / Manual (Touch Panel / Ring)		Auto / Manual (Touch Panel / Dial)		Auto / Manual (Touch Panel)		—			
F-number (Maximum Aperture) F值 (最大光圈)		F2.8-F4.5		F1.8-F3.4		F2.8-F4.5		F1.8-F4.0		F2.8			
Angle of View (35mm equivalent) 视角 (35mm等效)		29.0mm*1		29.8mm*1		26.8mm*1		26.8mm*1		17.1mm*1 / 21.8mm			
Focal Distance 焦距		f=9.3-111.6mm		f=3.8-38.0mm		f=9.3-111.6mm		f=1.9-57.0mm		f=1.9-57.0mm			
Focal length in "Movie" position 处于"Movie"位置 (35mm equivalent) 焦距 (35mm等效)		f=29.0-348.0mm (16:9)*1		f=29.8-298.0mm (16:9)*1		f=29.0-348.0mm (16:9)*1		f=26.8-804.0mm (16:9)*1		f=17.1mm (170°) / f=21.8mm (120°)			
Focal length in "Photo" position 处于"Photo"位置 (35mm equivalent) 焦距 (35mm等效)		f=29.0-348.0mm (16:9) / f=35.5-426.0mm (4:3)		f=26.8-268.0mm (16:9) / f=32.8-328.0mm (4:3)		f=29.0-348.0mm (16:9) / f=35.5-426.0mm (4:3)		f=26.8-804.0mm (16:9) / f=32.8-984.0mm (4:3)		f=17.1mm (170°) / f=21.8mm (120°)			
Filter Diameter 滤镜直径		62mm		52mm		62mm		46mm		37mm			
Viewfinder/Monitor 取景器/显示屏		0.39 type / OLED / Color 1,440K dots equivalent		0.24 type / Color 1,555K dots equivalent		0.39 type / OLED / Color 1,440K dots equivalent		—		—			
Monitor 显示屏		3.5 type Xtra Fine LCD display / 921Kdots		3.0 type Xtra Fine LCD display / 921Kdots		3.5 type Xtra Fine LCD display / 921Kdots		3.0 type Clear Photo LCD display / 460Kdots		2.7 type Clear Photo LCD display / 230Kdots			
Light Output 光输出		—		Up to 50 lumen		—		Up to 25 lumen		—			
Endurance (Battery Life) (Approx.) 连续使用时间 (电池寿命) (约)		—		2h. 25min. (with Supplied Battery)		—		1h. 35min. (with Supplied Battery)		—			
Imaging Processor 影像处理器		BIONZ X		BIONZ X		BIONZ X		BIONZ X		BIONZ X			
Minimum Illumination 最低亮度		<4K> STD: 6lux*3 / LOW: 3lux*4 <HD> STD: 3lux*3 / LOW: 1.7lux*4		<4K> STD: 9lux*3 / LOW: 5lux*4 <HD> STD: 6lux*3 / LOW: 3lux*4		STD: 3lux*5 / LOW: 1.7lux*6		STD: 6lux*4 / LOW: 3lux*4		6lux*6			
Image Stabilization 防抖		Optical SteadyShot		Balanced Optical SteadyShot		Optical SteadyShot		Balanced Optical SteadyShot		Optical SteadyShot with Intelligent Active Mode			
Minimum Focus Distance (Approx.) 最近对焦距离 (约)		1cm (Wide) / 100cm (Tele)		1cm (Wide) / 80cm (Tele)		1cm (Wide) / 80cm (Tele)		1cm (Wide) / 80cm (Tele)		SteadyShot Active Mode 30cm			
Shutter Speed Auto Control Range 快门速度自动控制范围		1/8 - 1/10,000		1/6 - 1/10,000		1/8 - 1/10,000		1/6 - 1/10,000		1/30 - 1/10,000			
Recording Media 录制媒体		<XAVC S> SDXC Memory Card*7 <AVCHD, Still> Memory Stick PRO Duo (Mark 2), Memory Stick PRO-HG Duo, Memory Stick XC-HG Duo, SD / SDHC / SDXC Memory Card*8		<XAVC S 4K (100Mbps)> Internal Flash Memory, SDXC Memory Card (UHS-I U3 or Higher) <XAVC S 4K (60Mbps) / HD> Internal Flash Memory, SDXC Memory Card*7 <AVCHD, Still> Internal Flash Memory, Memory Stick PRO Duo (Mark 2), Memory Stick PRO-HG Duo, Memory Stick XC-HG Duo, SD / SDHC / SDXC Memory Card*8		<XAVC S> SDXC Memory Card*7 <AVCHD, Still> Memory Stick PRO Duo (Mark 2), Memory Stick PRO-HG Duo, Memory Stick XC-HG Duo, SD / SDHC / SDXC Memory Card*8		<XAVC S> Internal Flash Memory, microSDXC Memory Card*7 <AVCHD, Still> Internal Flash Memory, Memory Stick Micro (Mark 2), microSD / SDHC / SDXC Memory Card*8		<XAVC S (100Mbps)> microSDXC Memory Card (UHS-I U3 or Higher) <XAVC S (60Mbps) / 50Mbps)> microSDXC Memory Card*7 <MP4> Memory Stick Micro (Mark 2), microSD / SDHC / SDXC Memory Card*8			
Internal Media 内置媒体		—		Flash Memory 64GB*9		Flash Memory 32GB*9		Flash Memory 16GB*9		—			
Video Format 视频格式		XAVC S format MPEG4-AVC / H.264 AVCHD format ver.2.0 compatible: MPEG4-AVC / H.264 MP4: MPEG-4 AVC / H.264		XAVC S format MPEG4-AVC / H.264 AVCHD format ver.2.0 compatible: MPEG4-AVC / H.264 MP4: MPEG-4 AVC / H.264		XAVC S format: MPEG4-AVC / H.264 AVCHD format ver.2.0 compatible: MPEG4-AVC / H.264 MP4: MPEG-4 AVC / H.264		XAVC S format: MPEG4-AVC / H.264 AVCHD format ver.2.0 compatible: MPEG4-AVC / H.264 MP4: MPEG-4 AVC / H.264		XAVC S format: MPEG-4 AVC / H.264 MP4: MPEG-4 AVC / H.264			
Video Mode (Resolution) 视频模式 (分辨率)		<XAVC S 4K> 3,840 x 2,160 25p / 24p <XAVC S HD> 1,920 x 1,080 50p / 25p / 24p <AVCHD> PS: 1,920 x 1,080 50p FX: 1,920 x 1,080 24p / 50i FH: 1,920 x 1,080 24p / 50i HQ: 1,440 x 1,080 50i LP: 1,440 x 1,080 50i <MP4> 1,280 x 720 25p		<XAVC S 4K> 3,840 x 2,160 / 25p, 24p <XAVC S HD> 1,920 x 1,080 / 50p, 25p, 24p <AVCHD> PS: 1,920 x 1,080 / 50p FX: 1,920 x 1,080 / 50i FH: 1,920 x 1,080 / 25p, 24p, 50i HQ: LP: 1,440 x 1,080 / 50i <MP4> 1,280 x 720 25p		<XAVC S HD> 1,920 x 1,080 50p / 25p / 24p <AVCHD> PS: 1,920 x 1,080 50p FX: 1,920 x 1,080 24p / 50i FH: 1,920 x 1,080 24p / 50i HQ: LP: 1,440 x 1,080 50i <MP4> 1,280 x 720 25p		<XAVC S HD> 1,920 x 1,080 / 50p, 25p <AVCHD> PS: 1,920 x 1,080 50p FX: 1,920 x 1,080 50i FH: 1,920 x 1,080 50i HQ: LP: 1,440 x 1,080 50i <MP4> 1,280 x 720 25p		<AVCHD> PS: 1,920 x 1,080 50p FX: 1,920 x 1,080 50i FH: 1,920 x 1,080 50i HQ: LP: 1,440 x 1,080 50i <MP4> 1,280 x 720 25p			
Video Recording Rate (Average Bit Rate / VBR) (Approx.) *10*11 视频录制速率 (平均比特率 / 可变比特率) (约) *10*11		<XAVC S 4K> 60Mbps <XAVC S HD> 50Mbps <AVCHD> PS: 28Mbps / FX: 24Mbps / FH: 17Mbps / HQ: 9Mbps / LP: 5Mbps <MP4> 3Mbps		<XAVC S 4K> 100Mbps / 60Mbps <XAVC S HD> 50Mbps <AVCHD> PS: 28Mbps / FX: 24Mbps / FH: 17Mbps / HQ: 9Mbps / LP: 5Mbps <MP4> 3Mbps		<XAVC S HD> 50Mbps <AVCHD> PS: 28Mbps / FX: 24Mbps / FH: 17Mbps / HQ: 9Mbps / LP: 5Mbps <MP4> 3Mbps		<XAVC S HD> 50Mbps <AVCHD> PS: 28Mbps / FX: 24Mbps / FH: 17Mbps / HQ: 9Mbps / LP: 5Mbps <MP4> 3Mbps		<AVCHD> PS: 28Mbps / FX: 24Mbps / FH: 17Mbps / HQ: 9Mbps / LP: 5Mbps <MP4> 3Mbps			
Audio Compression Format 音频压缩格式		MPEG-4 Linear PCM 2ch (48kHz / 16bit)*12 / Dolby Digital 5.1ch *13 / Dolby Digital 2ch*13 / MPEG-4 AAC-LC 2ch*14		MPEG-4 Linear PCM 2ch (48kHz / 16bit)*12 / Dolby Digital 5.1ch *13 / Dolby Digital 2ch*13 / MPEG-4 AAC-LC 2ch*14		MPEG-4 Linear PCM 2ch (48kHz / 16bit)*12 / Dolby Digital 5.1ch *13 / Dolby Digital 2ch*13 / MPEG-4 AAC-LC 2ch*14		Dolby Digital 5.1ch*13 / Dolby Digital 2ch*13 / MPEG-4 AAC-LC 2ch*14		LPCM 2ch*12 MPEG-4 AAC-LC 2ch*14			
Microphone 麦克风		● (Built-in Zoom)		● (Built-in Zoom)		● (Built-in Zoom)		● (Built-in)		● (Built-in)			
Speaker 扬声器		● (Monaural Speaker)		● (Monaural Speaker)		● (Monaural Speaker)		● (Monaural Speaker)		● (Monaural Speaker)			
Auto Wind Noise Reduction 自动风噪减弱		● (On/Off)		● (On/Off)		● (On/Off)		—		—			
Still Picture (Approx.) 静态图像		Photo Mode / Movie Mode (4:3 unsupported) 照片模式 / 动态影像模式 (不支持4:3) Photo Capture from Playback Movie 从回放动态影像中截取照片		L: 20.6 Megapixels 16:9 (5,968 x 3,352)*15 15.4 Megapixels 4:3 (4,464 x 3,352) M: 14.2 Megapixels 16:9 (5,024 x 2,824) 10.6 Megapixels 4:3 (3,760 x 2,824) S: 2.1 Megapixels 16:9 (1,920 x 1,080) 0.3 Megapixels 4:3 (640 x 480)		L: 20.6 Megapixels 16:9 (6,048 x 3,400) 15.4 Megapixels 4:3 (4,528 x 3,400) M: 10.3 Megapixels 16:9 (4,288 x 2,408) 7.7 Megapixels 4:3 (3,216 x 2,408) S: 2.1 Megapixels 16:9 (1,920 x 1,080) 0.3 Megapixels 4:3 (640 x 480)		L: 20.0 Megapixels 16:9 (5,968 x 3,352) 15.0 Megapixels 4:3 (4,464 x 3,352) M: 14.2 Megapixels 16:9 (5,024 x 2,824) 10.6 Megapixels 4:3 (3,760 x 2,824) S: 2.1 Megapixels 16:9 (1,920 x 1,080) 0.3 Megapixels 4:3 (640 x 480)		L: 9.2 Megapixels 16:9 (4,032 x 2,272) 6.9 Megapixels 4:3 (3,024 x 2,272) S: 2.1 Megapixels 16:9 (1,920 x 1,080) 0.3 Megapixels 4:3 (640 x 480)		PHOTO Mode: 8.8 Megapixels 16:9 (3,952 x 2,224) Interval Photo Recording Mode: 2.1 Megapixels 16:9 (1,920 x 1,080) Motion Shot LE Photo Recording Mode: 2.2 Megapixels 16:9 (1,984 x 1,120)	
Interface 接口		● (Wi-Fi Compatible, IEEE 802.11 b/g/n (2.4GHz band))*16 ● (NFC forum Type 3 Tag compatible)		● (Wi-Fi Compatible, IEEE 802.11 b/g/n (2.4GHz band))*16 ● (NFC forum Type 3 Tag compatible)		● (Wi-Fi Compatible, IEEE 802.11 b/g/n (2.4GHz band))*16 ● (NFC forum Type 3 Tag compatible)		● (Wi-Fi Compatible, IEEE 802.11 b/g/n (2.4GHz band))*16 ● (NFC forum Type 3 Tag compatible)		● (Wi-Fi Compatible, IEEE 802.11 b/g/n (2.4GHz band))*16 ● (NFC forum Type 3 Tag compatible)			
HDMI Terminal HDMI接口		● (HDMI micro)*17		● (HDMI micro)*17		● (HDMI micro)*17		● (HDMI micro)*17		● (HDMI micro)*17			
Microphone input 麦克风输入		● (Stereo Minijack)		● (Stereo Minijack)		● (Stereo Minijack)		—		● (Stereo Minijack)			
Headphone Jack 耳机插孔		● (Stereo Minijack)		● (Stereo Minijack)		● (Stereo Minijack)		—		—			
USB Port USB接口		● (Type A (built-in) / USB2.0 High-speed (mass-storage / MTP))		● (Type A (built-in) / USB2.0 High-speed (mass-storage / MTP))		● (Type A (built-in) / USB2.0 High-speed (mass-storage / MTP))		● (Type A (built-in) / USB2.0 High-speed (mass-storage / MTP))		● (Multi / Micro USB)*18			
Projector Input 投影机输入接口		—		● (HDMI micro)*19		—		● (HDMI micro)*19		—			
Accessory Shoe 配件插槽		● (Multi Interface Shoe)		● (Multi Interface Shoe)		● (Multi Interface Shoe)		—		—			
Water Proof / Dust Proof / Shockproof 防水 / 防尘 / 防震 *20*21*22		—		—		—		—		● (In use with Waterproof Case (SPK-X1))			
Splash Proof / Freezeproof 防溅 / 防冻		—		—		—		—		● (Equivalent to IPX4)*23*24 / ● (Low temperatures to -10°C)			
Power Requirement 电源要求		AC Adaptor 8.4V / Battery 6.8V, 7.2V		AC Adaptor 8.4V / Battery 6.8V		AC Adaptor 8.4V / Battery 6.8V, 7.2V		AC Adaptor 5.0V / Battery 6.8V, 7.2V		3.6V (battery pack)			
Battery continuous recording duration (with supplied Battery) (Approx.) 电池连续工作时间 (使用随机电池) (约)		2h. 15min.*25		3h. 15min.*26		1h. 45min.*25		2h. 30min.*26		3h.*25			
Movie Recording Time (with internal Media) (Approx.) *28*29 动态影像录制时间 (含内置媒体) (约) *28*29		—		26h.		—		7h. 55min.		—			
Charge on camcorder (Charging time with supplied Battery) (Approx.) *30 摄像机充电 (使用随机电池的充电时间) (约) *30		3h. 25min.		3h. 25min.		2h. 20min.		2h. 45min.		4h. 5min.			
Power Consumption *31 功耗 *31		4K: 5.6W		4K: 5.6W		HD: 3.5W (in LCD Operation)		HD: 2.5W (in LCD Operation)		2.0W (in Display Panel Operation)			
Dimension (W x H x D) (Including Supplied Battery) (Approx.) *32 尺寸 (宽 x 高 x 深) (包括随机电池) (约) *32		90 x 83.5 x 223.5mm (Including Lens Hood)		75 x 78.5 x 155mm		90 x 83.5 x 223.5mm (Including Lens Hood)		61.5 x 66.5 x 130.5mm		61.0 x 59.5 x 128.5mm			
Mass (with Supplied Battery) (Approx.) *33 重量 (使用随机电池) (约) *33		915g (Supplied NP-FV70)		725g (Supplied NP-FV70)		870g (Supplied NP-FV50)		380g (Supplied NP-FV50)		270g (Supplied NP-FV50)			
Supplied Accessories 随机配件		Rechargeable Battery Pack (NP-FV70), AC Adaptor, Power Cord, HDMI (micro) Cable, USB Connection Support Cable, "Operating Guide", Remote Commander (RMT-835 with Battery (CR2025)), Lens Hood, Lens Cap		Rechargeable Battery Pack (NP-FV70), AC Adaptor, HDMI (micro) Cable, USB Connection Support Cable, "Operating Guide"		Rechargeable Battery Pack (NP-FV50), AC Adaptor, Power Cord, HDMI (micro) Cable, USB Connection Support Cable, "Operating Guide", Remote Commander (RMT-835 with Battery (CR2025)), Lens Hood, Lens Cap		Rechargeable Battery Pack (NP-FV50), AC Adaptor, HDMI (micro) Cable, USB Connection Support Cable, "Operating Guide"		Rechargeable Battery Pack (NP-FV50), AC Adaptor, HDMI (micro) Cable, USB Connection Support Cable, "Operating Guide"			






*1 When SteadyShot is set to "STANDARD" or "OFF". 当防抖功能设为 "标准" 或 "关闭" 时。 *2 The factory setting is "Off." Digital zoom ratio includes optical zoom ration. 出厂设置为 "关闭"。数字变焦比包含光学变焦比。 *3 1/50 Shutter Speed. 1/50快门速度。
*4 1/25 Shutter Speed. 1/25快门速度。 *5 1/30 Shutter Speed. 1/30快门速度。 *6 1/30 Shutter Speed. 1/30快门速度。 *7 Class 10 or higher. Class 4 or higher. Class 10或更高。 *8 Class 4 or higher. Class 4或更高。
*9 1GB equals 1 billion bytes, a portion of which is used for system management and / or application files. Only pre-installed demonstration movie may be deleted. 1GB等于10亿字节。其中一部分用于系统管理和应用程序文件。仅可删除预装的演示视频。
*10 Bit Rate is described by system rate (including movie, sounds and others), but rate by the recording mode (including dynamic image, audio, etc.). *11 PS mode (28Mbps) and FX mode (24Mbps) are peak bit rate. PS模式(28Mbps)和FX模式(24Mbps)为峰值比特率。
*12 Video Mode is XAVC S HD or 4K. 视频模式为XAVC S HD或4K格式。
*13 Video Mode is AVCHD. 视频模式为AVCHD格式。
*14 Video Mode is MP4. 视频模式为MP4格式。
*15 Video Mode is XAVC S 4K. 视频模式为XAVC S 4K格式。
*16 (Configuration method / Access method) WPS or manually / infrastructure mode. When connecting to smartphones, the camera can always work as a base without a wireless access point. (Security: WEP / WPA-PSK / WPA2-PSK) (配置方法/连接方法) WPS或手动/基础设施模式。当连接到智能手机时, 摄像机始终可以作为基站工作, 而无需使用无线接入点。(安全设置: WEP / WPA-PSK / WPA2-PSK) *17 Output only. 仅限输出。
*18 Supports Micro USB compatible device. 支持微型USB兼容设备。
*19 Input only. 仅限输入。
*20 As for dust-proof / shock-proof performance, there is no guarantee that the camcorder will not become scratched

or dented. 对于防尘/防震性能, 不保证本机不会产生划痕或凹痕。
*21 Meeting to MIL-STD 810F Method 516.5-Shock standards, this product has passed the required tests when dropped from a height of 1.5 m above a 5 cm-thick plywood board (with the LCD screen closed, facing toward the camcorder body). * Depending on use conditions and circumstances, no guarantee is made regarding damage to, malfunction of, or the water-proof performance of this camcorder. 按照MIL-STD 810F Method 516.5-Shock标准, 本产品已通过从1.5米厚胶合板上方1.5米处持续不断的测试 (液晶屏幕机身关闭的状态下)。* 根据具体的使用情况和环境, 对本机的损坏、故障或防水性能不予保证。
*22 Recording / playback times may be reduced in low-temperature conditions. 低温条件下录制/播放时间可能会减少。
*23 Not to withstand continuous submersion or harsh. 无法经受连续浸泡或剧烈的条件。
*24 Splash proof performance is based on standard testing by Sony. 防震性能基于索尼的标准测试。
*25 AVCHD-HQ mode, LCD ON. AVCHD-HQ模式, 液晶屏打开。
*26 AVCHD-FH mode, LCD ON. AVCHD-FH模式, 液晶屏打开。
*27 MP4-HQ mode. MP4-HQ模式。
*28 Capacity will vary based on type and complexity of images recorded. 容量因所录制影像的类型和复杂性而有所不同。
*29 AVCHD-LP mode, Audio 2ch, LCD ON. AVCHD-LP模式, 2声道音频, 液晶屏打开。
*30 When using the AC adaptor. When the AC adaptor is not supplied, using USB charging. 使用AC适配器时。未提供AC适配器时, 使用USB充电。
*31 Recording mode and media are default settings. 录制模式和媒体处于默认设置。
*32 Including the projecting parts. 包括突出部分。
*33 Including a battery pack and a media (if a lens hood is supplied, including it too). 包括电池组和媒体 (如提供遮光罩, 也包括遮光罩)。

Digital Camcorder Specifications 数码摄像机规格

Model Name 机型名称		NEX-VG900EH(JE)  P5	NEX-VG30EH(JE)  P5	
High-Definition [1,920 x 1,080]				
Image Sensor 影像传感器	Type 类型	35mm Full-Frame Exmor HD CMOS Sensor (35.8 x 23.9mm)	APS-C type (23.5 x 15.6mm) Exmor APS HD CMOS Sensor with RGB primary color filters	
	Number of pixels (Approx.) 像素数 (约)	24.3 Megapixels (effective), 24.7 Megapixels (total)	16.1 Megapixels (effective), 16.7 Megapixels (total)	
Lens 镜头	Lens compatibility 镜头兼容性	Sony E-Mount lenses	Sony E-mount lenses	
	Model Name 机型名称	SAL2470Z (Vario-Sonnar T* 24-70mm F2.8 ZA SSM)	SEL18200 (E PZ 18-200mm F3.5-6.3 OSS)	
	Lens configuration 镜头构成	13 groups, 17 elements	12 groups, 17 elements	
	Focal length (35mm equivalent) 焦距 (35mm等效)	In photo mode: f=36mm – 105mm	In photo mode: f=27mm – 300mm	
	No. of aperture blade 光圈叶片数	9 blades	7 blades	
	F-number F值	F2.8	F3.5 (Wide) - F6.3 (Tele)	
	Max. magnification 最大放大倍率	0.25x	0.35x	
	Min. focus distance 最近对焦距离	0.34m	0.3m (Wide) – 0.5m (Tele)	
	Filter diameter 滤镜直径	77mm	67mm	
	Dimensions (max. dia. x length) 尺寸 (最大直径 x 长度)	83 x 111mm	93.2 x 99mm (Wide), 93.2 x 174.0mm (Tele)	
Mass 重量	955g	649g		
Recording system 记录系统	Recording format 记录格式	Video: HD: MPEG4-AVC / H.264, SD-MPEG2-PS Audio: Dolby Digital 5.1ch / Dolby Digital 2ch	Video: HD: MPEG4-AVC / H.264, SD: MPEG2-PS Audio: Dolby Digital 5.1ch / Dolby Digital 2ch	
	Progressive Mode (HD) 逐行扫描模式 (HD)	50p / 25p / 24p	50p / 25p / 24p	
	Total bit rate (Approx.) 总比特率 (约)	PS mode: 28Mbps / FX mode: 24Mbps / FH mode: 17Mbps / HQ mode: 9Mbps / LP mode: 5Mbps	PS mode: 28Mbps / FX mode: 24Mbps / FH mode: 17Mbps / HQ mode: 9Mbps / LP mode: 5Mbps	
	Built-in Microphone 内置麦克风	●	●	
	Speaker 扬声器	Monaural Speaker	Monaural Speaker	
	Auto Wind Noise Reduction 自动风噪减弱	● (Off / On)	● (Off / On)	
	still image 静态影像	Recording format 记录格式	JPEG (DCF Ver.2.0, Exif Ver.2.3, MPF Baseline compliant)	JPEG (DCF Ver.2.0, Exif Ver.2.3, MPF Baseline compliant)
		Image size (pixels) 影像尺寸 (像素)	Aspect ratio 3:2 纵横比3:2 6,000 × 4,000 (24.0M Full size), 3,936 × 2,624 (10.3M Full size), 2,640 × 1,760 (4.6M Full size), 3,936 × 2,624 (10.3M APS-C size), 2,640 × 1,760 (4.6M APS-C size), 1,728 × 1,152 (2.0M APS-C size)	4,912 × 3,264 (16.0M), 3,568 × 2,368 (8.4M), 2,448 × 1,624 (4.0M)
		Aspect ratio 16:9 纵横比16:9	6,000 × 4,000 (20.3M Full size), 3,936 × 2,624 (8.7M Full size), 2,640 × 1,760 (3.9M Full size), 3,936 × 2,624 (8.7M APS-C size), 2,640 × 1,760 (3.9M APS-C size), 1,728 × 1,152 (1.7M APS-C size)	4,912 × 2,760 (13.6M), 3,568 × 2,000 (7.1M), 2,448 × 1,376 (3.4M)
		Image quality mode 画质模式	JPEG / JPEG + RAW / RAW	JPEG / JPEG + RAW / RAW
Recording Media 录制媒体	<AVCHD, Still>Memory Stick PRO Duo (Mark 2), Memory Stick PRO-HG Duo, Memory Stick XC-HG Duo, SD / SDHC / SDXC Memory Card ¹	<AVCHD, Still>Memory Stick PRO Duo (Mark 2), Memory Stick PRO-HG Duo, Memory Stick XC-HG Duo, SD / SDHC / SDXC Memory Card ¹		
White balance modes 白平衡模式				
	Auto / Onepush / Outdoor / Indoor / WB Temp	Auto / Onepush / Outdoor / Indoor / WB Temp	Auto / Onepush / Outdoor / Indoor / WB Temp	
Shutter speeds 快门速度	Auto 自动	In movie mode: 1/48 - 1/10,000 sec. (24p), 1/50 - 1/10,000 sec. (other), In still image mode: 30-1/8,000 sec.	In movie mode: 1/48 - 1/10,000 sec. (24p), 1/50 - 1/10,000 sec. (other), In still image mode: 30 - 1/4,000 sec.	
	Manual 手动	In movie mode: 1/3 - 1/10,000 sec., In still image mode: 30 - 1/8,000 sec.	In movie mode: 1/3 - 1/10,000 sec., In still image mode: 30 - 1/4,000 sec.	
Gain 增益	Auto / Manual (0-30 dB)	Auto / Manual (0-30 dB)	Auto / Manual (0-30 dB)	
Zoom Control 变焦控制	Digital Zoom 数字变焦	● (x 2.0)	● (x 2.0)	
	Power Zoom Control 电动变焦控制	●	●	
	Zoom Lever 变焦杆	●	●	
	Zoom Speed 变焦速度	Variable / Fix max 32 Steps	Variable / Fix max 32 Steps	
Monitor 显示屏	Type 类型	3.0 type, Xtra Fine LCD	3.0 type, Xtra Fine LCD	
	Total no. of dots 总点数	921,600 dots	921,600 dots	
Viewfinder 取景器	Type 类型	0.5 type, XGA OLED	0.5 type, XGA OLED	
	Effective no. of dots 有效点数	2,359,296 dots conversion	2,359,296 dots conversion	
	Field coverage 视场	100%	100%	
Interface 接口	Video / Audio output 视频/音频输出	HDMI mini connector	HDMI mini connector	
	Headphone output 耳机输出	Stereo mini jack x 1	Stereo mini jack x 1	
	Microphone input 麦克风输入	Stereo mini jack x 1	Stereo mini jack x 1	
	PC interface 电脑接口	USB2.0 Hi-speed (mass-storage, MTP)	USB2.0 Hi-speed (mass-storage, MTP)	
Other 其他	Multi interface Shoe 多接口系统	●	●	
	Power Requirements 电源要求	AC Adaptor 8.4V / battery 7.2V	AC Adaptor 8.4V / battery 7.2V	
	Power Consumption ² 功耗 ²	HD: 4.7W (in LCD operation)	HD: 4.2W (in LCD operation)	
	Dimension (W x H x D) (Body only) (Approx.) 尺寸 (宽 x 高 x 深) (仅机身) (约)	105 x 130 x 223mm	91 x 130 x 223mm	
Mass (Body only) (Approx.) 重量 (仅机身) (约)	825g	650g		
Supplied Accessories 随机配件				
	Rechargeable Battery Pack (NP-FV70), AC Adaptor, Power Cord, Component A/V Cable, A/V Connecting Cable, USB Cable, Body cap, Mount Adaptor (LA-EA3), SAL2470Z (Vario-Sonnar T* 24-70mm F2.8 ZA SSM), Lens hood, Lens front cap, Lens rear cap, Battery cover, Wind screen, Large eye cup, Remote Commander (RMT-835 with Battery (CR2025)), CD-ROM	Rechargeable Battery Pack (NP-FV70), AC Adaptor, Power Cord, Component A/V Cable, A/V Connecting Cable, USB Cable, Body cap, SELP18200 (E PZ 18-200mm F3.5-6.3 OSS), Lens hood, Lens front cap, Lens rear cap, Battery cover, Wind screen, Large eye cup, Remote Commander (RMT-835 with Battery (CR2025)), CD-ROM		

Digital Still Camera 数码相机规格

Model Name 机型名称		DSC-RX1RIE32  P12	DSC-RX100M3(E32)  P12	DSC-RX100JE  P12	DSC-HX300JE  P13	DSC-WX350JE  P13
Lens 镜头						
	Lens Construction 镜头结构	ZEISS Sonnar T* 8 elements in 7 groups (3 aspherical elements including AA lens)	ZEISS Vario-Sonnar T* 10 elements in 9 groups (9 aspherical elements including AA lens)	ZEISS Vario-Sonnar T* 7 elements in 6 groups (4 aspheric elements including AA lens)	ZEISS Vario-Sonnar T* 15 elements in 10 groups (including 1 superED glass element, 2 ED glass element and 3 aspheric element)	G Lens 11 elements in 10 groups (including 5 aspheric elements)
	Optical Zoom Magnification 光学变焦倍率	—	2.9x (Optical Zoom during movie recording)	3.6x	50x	20x
	Clear Image Zoom 清晰影像变焦	2x (Still Image only)	5.8x (Both still image and movie)	7.2x (Still Image only)	100x (Still Image only)	40x (Both still image and movie)
	Digital Zoom Magnification (Approx.) 数码变焦倍率 (约)	24M: 4x / 10M: 6.1x / 4.6M: 9.1x	20M: 11x / 10M: 16x / 5M: 23x / VGA: 44x	20M: 14x / 10M: 20x / 5M: 28x / VGA: 54x	20M: 200x / 10M: 284x / 5M: 400x / VGA: 810x / 15M (16:9): 200x / 2M (16:9): 540x	18M: 80x / 10M: 107x / 5M: 151x / VGA: 306x / 13M (16:9): 80x / 2M (16:9): 204x
	F-number (Maximum Aperture) F值 (最大光圈)	F2.0	F1.8 (Wide) - 2.8 (Tele)	F1.8 (Wide) - 4.9 (Tele)	F2.8 (Wide) - 6.3 (Tele)	F3.5 (Wide) - 6.5 (Tele)
	Focal Length (f=) 焦距 (f=)	f= 35mm	f= 8.8-25.7mm	f= 10.4-37.1mm	f= 4.3-21.5mm	f= 4.3-86.0mm
	35mm equivalent (Still 4:3) 35mm等效 (4:3静态图像)	—	f= 25-73mm	f= 30-108mm	f= 24-1200mm	f= 25-500mm
Image Sensor 影像传感器	Type / Size 类型 / 尺寸	Exmor CMOS Sensor, 35mm full-frame (35.8mm x 23.9mm)	ExmorR CMOS Sensor, 1.0 type (13.2 x 8.8mm)	Exmor CMOS Sensor, 1.0 type (13.2 x 8.8mm)	Exmor R CMOS Sensor, 1/2.3 type	Exmor R CMOS Sensor, 1/2.3 type
	Number of effective pixels (Approx.) 有效像素数 (约)	24.3 Megapixels	20.1 Megapixels	20.2 Megapixels	20.4 Megapixels	18.2 Megapixels
	Imaging Processor 影像处理器	BIONZ	BIONZ X	BIONZ	BIONZ	BIONZ X
	Exposure Compensation 曝光补偿	Plus / Minus 3.0EV, 1/3EV step	Plus / Minus 3.0EV, 1/3EV step	Plus / Minus 3.0EV, 1/3EV step	Plus / Minus 2.0EV, 1/3EV step	Plus / Minus 2.0EV, 1/3EV step
	Shutter Speed 快门速度	iAuto (4" - 1/2,000) / Program Auto (30" - 1/2,000) / Aperture Priority (30" - 1/2,000) / Shutter Priority (30" - 1/2,000) / Manual Exposure (Bulb, 30" - 1/2,000)	iAuto (4" - 1/2,000) / Program Auto (1" - 1/2,000) / Manual (Bulb, 30" - 1/2,000) / Aperture Priority (8" - 1/2,000) / Shutter Priority (30" - 1/2,000)	iAuto (4" - 1/2,000) / Program Auto (1" - 1/2,000) / Manual (Bulb, 30" - 1/2,000) / Aperture Priority (8" - 1/2,000) / Shutter Priority (30" - 1/2,000)	iAuto (4" - 1/4,000) / Program Auto (1" - 1/4,000) / Aperture Priority (8" - 1/2,000) / Shutter Priority (30" - 1/4,000) / Manual (30" - 1/4,000)	iAuto (4" - 1/1,600) / Program Auto (1" - 1/1,600)
	Light Metering Mode 测光模式	Multi Segment / Center Weighted / Spot	Multi Pattern / Center Weighted / Spot	Multi Segment / Center Weighted / Spot	Multi Pattern / Center Weighted / Spot	Multi Pattern / Center Weighted / Spot
	ISO Sensitivity (REI) ISO感光度 (REI)	ISO100-25600 (1/3EV step) (expandable to ISO 50/64/80), AUTO (ISO100-25600, selectable with upper / lower limit), Multi Frame NR: ISO100-102400 (1EV step), AUTO (ISO100-25600, selectable with upper / lower limit)	Auto (ISO125-12800, selectable with upper / lower limit), 125 / 160 / 200 / 250 / 320 / 400 / 500 / 640 / 800 / 1000 / 1250 / 1600 / 2000 / 2500 / 3200 / 4000 / 5000 / 6400 / 8000 / 10000 / 12800 (Extendable to ISO80 / 100), Multi-Frame NR: Auto (ISO125-12800), 200 / 400 / 800 / 1600 / 3200 / 6400 / 12800 / 25600 ³	Auto (ISO125-12800, selectable with upper / lower limit), 125 / 160 / 200 / 250 / 320 / 400 / 500 / 640 / 800 / 1000 / 1250 / 1600 / 2000 / 2500 / 3200 / 4000 / 5000 / 6400 / 8000 / 10000 / 12800 ⁴ equivalent	Auto / 80 / 100 / 125 / 160 / 200 / 250 / 320 / 400 / 500 / 640 / 800 / 1000 / 1250 / 1600 / 2000 / 2500 / 3200 / 4000 ⁴ / 5000 ⁴ / 6400 ⁴ / 8000 ⁴ / 10000 ⁴ / 12800 ⁴	Auto / 80 / 100 / 200 / 400 / 800 / 1600 / 3200 / 6400 ⁴ / 12800 ⁴
	SteadyShot 防抖功能	System Name 系统名称 EIS (blur reduction) for movie	Optical SteadyShot Optical SteadyShot	Optical SteadyShot Optical SteadyShot	Optical SteadyShot Optical SteadyShot	Optical SteadyShot Optical SteadyShot
	Optical SteadyShot Active Mode (for Movie) 光学防抖增强模式 (动态影像适用)	—	● (Intelligent Active Mode, Optical type with electronic compensation, Anti Rolling type)	●	●	● (Intelligent Active Mode)
	Focus Mode 对焦模式	Focus Mode: Single-shot AF (AF - S) / Continuous AF (AF - C) / Direct Manual Focus (DMF) / Manual Focus (MF) Focus Area: Multi point AF (25 points) / Center weighted AF / Flexible spot / Flexible spot (tracking focus) / Flexible spot (face tracking)	Single-shot AF / Continuous AF / DMF / Manual Focus	Continuous AF (AF - C) / Direct Manual Focus (DMF) / Manual Focus Focus Mode: Multi Point AF / Center Weighted AF / Flexible Spot / Flexible Spot (Tracking Focus) / Flexible Spot (Face Tracking) / Single - Shot AF (AF - S)	Multi Point AF / Center Weighted AF / SpotAF / Flexible spot / Maunal / Tracking Focus / Face Tracking Focus	Single-shot AF
White Balance Mode 白平衡模式	Auto / Daylight / Shade / Cloudy / Incandescent / Fluor (Warm White) / Fluor (Cool White) / Fluor (Day White) / Fluor (Daylight) / Flash / C.Temp./Filter / Custom	Auto / Daylight / Shade / Cloudy / Incandescent / Fluor (Warm White) / Fluor (Cool White) / Fluor (Day White) / Fluor (Daylight) / Flash / C.Temp./Filter / Custom	Auto / Daylight / Shade / Cloudy / Incandescent / Fluor (Warm White) / Fluor (Cool White) / Fluor (Day White) / Fluor (Daylight) / Flash / C.Temp./Filter / Custom	Auto / Daylight / Shade / Cloudy / Incandescent / Fluor (Warm White) / Fluor (Cool White) / Fluor (Day White) / Fluor (Daylight) / Flash / C.Temp./Filter / Custom	Auto / Daylight / Cloudy / Fluorescent 1,2,3 / Incandescent / Flash / One Push (One Push Set) / White Balance Shift	Auto / Daylight / Cloudy / Incandescent / Fluor (Cool White) / Fluor (Day White) / Fluor (Daylight) / Flash / Custom
Flash Range (Approx.) 闪光范围 (约)	ISO Auto: 0.75m - 21.7m ISO 25600: up to 43.4m	ISO Auto: 0.4m - 10.2m (W) / 0.4m - 6.5m (T) ISO12800: up to 20.4m (W) / 13.0m (T)	ISO Auto: 0.30m - 17.1m (W) / 0.55m - 6.3m (T), ISO6400: up to 24.2m (W) / 8.9m (T)	ISO Auto: 0.5m - 8.5m (W) / 2.4m - 3.5m(T), ISO3200: up to 12.0m (W) / 5.1m (T)	ISO Auto: 0.2m - 4.3m (W) / 2.0m - 2.4 m (T) ISO3200: up to 6.1 m (W) / 3.4 m (T)	
Continuous Shooting Speed (maximum) (Maximum number of recorded pixels) 连拍速度 (最大) (最大录制像素数)	Speed Priority Continuous mode: 5 fps Continuous mode: 2.5 fps (AF - S)	10 fps (10 shots)	10 fps (10 shots)	10 fps (10 shots)	10 fps (10 shots)	
Shooting Mode (Still Image) 拍摄模式 (静态图像)	Superior Auto / Intelligent Auto / Program Auto / Aperture Priority / Shutter Priority / Manual / MR (Memory Recall) 1,2,3 / Movie / Panorama / Scene Selection / Picture Effect	Superior Auto / Intelligent Auto / Program Auto / Aperture Priority / Shutter Priority / Manual / Movie Mode / Program Auto / Aperture Priority / Shutter Speed Priority / Manual Exposure / Panorama / Scene Selection	Superior Auto / Intelligent Auto / Program Auto (Program shift available) / Smile Shutter / Shutter Priority / Aperture Priority / Manual / Panorama / Scene Selection / Movie Mode / Picture Effect	Superior Auto / Intelligent Auto / Easy Shooting / Program Auto / Smile Shutter / Movie Mode / Panorama / Shutter Speed Priority / Aperture Priority / Manual Exposure / Scene Selection / Picture Effect / 3D / Background Defocus	Program Auto / Movie Mode (Intelligent Auto / Scene Selection) / Panorama / Scene Selection / Intelligent Auto / Superior Auto	
Scene Selection 场景选择	Portrait / Landscape / Sports / Sunset / Night Portrait / Night Scene / Hand-held Twilight	Portrait / Sports Action / Macro / Landscape / Sunset / Night Scene / Handheld Twilight / Night Portrait / Anti Motion Blur / Pet Mode / Sunset / Fireworks / High Sensitivity	High Sensitivity / Night Scene / Handheld Twilight / Night Portrait / Landscape / Soft Skin / Anti Motion Blur / Backlight Correction HDR / Beach / Snow / Fireworks / Gourmet / Pet Mode	High Sensitivity / Night Scene / Handheld Twilight / Night Portrait / Landscape / Soft Skin / Anti Motion Blur / Backlight Correction HDR / Beach / Snow / Fireworks / Gourmet / Pet Mode	High Sensitivity / Night Scene / Handheld Twilight / Night Portrait / Landscape / Portrait / Soft Skin / Anti Motion Blur / Backlight Correction HDR / Beach / Snow / Fireworks / Gourmet / Pet Mode	
Panorama 全景	Sweep Panorama	Sweep Panorama	Sweep Panorama	360 Sweep Panorama	360 Sweep Panorama	
3D 3D	—	—	—	3D Still Image	—	
Picture Effect 照片效果	Toy Camera / Pop Color / Posterisation / Retro Photo / Soft High-key / Partial Color / High Contrast Monochrome / Soft Focus / HDR Painting / Richtone Monochrome / Miniature / Watercolor / Illustration	Toy camera / Pop Color / Posterization / Retro Photo / Soft High-key / Partial Color / High Contrast Monochrome / Soft Focus / HDR Painting / Richtone Monochrome / Miniature / Watercolor / Illustration	HDR Painting / Richtone Monochrome / Miniature / Toy Camera / Pop Color / Partial Color / Soft High-key / Watercolor / Illustration / High Contrast Monochrome / Soft Focus / Postzerization / Retro Photo	HDR Painting / Richtone Monochrome / Miniature / Toy Camera / Pop Color / Partial Color / Soft Focus / Watercolor / Illustration	Toy camera / Pop Color / Posterization / Retro Photo / Soft High-key / Partial Color / High Contrast Monochrome / Soft Focus / HDR Painting / Richtone Monochrome / Miniature / Watercolor / Illustration	
Picture Effect for Movie 动态影像的照片效果	—	Toy camera / Pop Color / Posterization / Retro Photo / Soft High-key / Partial Color / High Contrast Monochrome	—	Toy camera / Pop Color / Partial Color / Soft High-key	Toy camera / Pop Color / Posterization / Retro Photo / Soft High-key / Partial Color / High Contrast Monochrome	
Number of Recognized Scene 识别的场景数	33	Superior Auto: 44 / iAuto: 33	33	44	44	
Monitor 显示屏	Type 类型	3.0 type / 1,229,000 dots TFT LCD (Xtra Fine)	3.0 type / 1,228,800 dots / Up by 180°, Down by 45° TFT LCD (Xtra Fine)	3.0 type / 1,229,000 dots TFT LCD (Xtra Fine)	3.0 type / 921,600 dots TFT LCD	3.0 type / 460,800 dots TFT LCD
Viewfinder 取景器	Type 类型	—	0.39 type electronic viewfinder (OLED), 1,440,000dots	—	Optical (0.5cm (0.2 type), 201,600dots equivalent)	—
Digital Level Gauge 电子水平导航						
●						
Recording 录制	Compatible Recording Media 兼容录制媒体	Memory Stick Duo / Memory Stick PRO Duo / Memory Stick PRO Duo (High Speed) / Memory Stick PRO-HG Duo / Memory Stick Micro ⁵ / Memory Stick Micro (Mark2) ⁵ / Memory Stick XC-HG Duo / SD Memory Card / SDHC Memory Card / SDXC Memory Card / microSD Memory Card / microSDHC Memory Card ⁵ / microSDXC Memory Card ⁵	Memory Stick Duo / Memory Stick PRO Duo / Memory Stick PRO Duo (High Speed) / Memory Stick PRO-HG Duo / Memory Stick Micro ⁵ / Memory Stick Micro (Mark2) ⁵ / Memory Stick XC-HG Duo / SD Memory Card / SDHC Memory Card (LHS-I) / SDXC Memory Card / microSD Memory Card ⁵ / microSDHC Memory Card ⁵ / microSDXC Memory Card ⁵	Memory Stick Duo / Memory Stick PRO Duo / Memory Stick PRO Duo (High Speed) / Memory Stick PRO-HG Duo / Memory Stick Micro ⁵ / Memory Stick Micro (Mark2) ⁵ / SD Memory Card / SDHC Memory Card / SDXC Memory Card / microSD Memory Card ⁵ / microSDHC Memory Card ⁵	Memory Stick Duo / Memory Stick PRO Duo / Memory Stick PRO Duo (High Speed) / Memory Stick PRO-HG Duo / Memory Stick Micro ⁵ / Memory Stick Micro (Mark2) ⁵ / SD Memory Card / SDHC Memory Card / SDXC Memory Card / microSD Memory Card ⁵ / microSDHC Memory Card ⁵	Memory Stick Duo / Memory Stick PRO Duo / Memory Stick PRO Duo (High Speed) / Memory Stick PRO-HG Duo / Memory Stick Micro ⁵ / Memory Stick Micro (Mark2) ⁵ / SD Memory Card / SDHC Memory Card / SDXC Memory Card / microSD Memory Card ⁵ / microSDHC Memory Card ⁵
	Internal Memory (Approx.) 内存 (约)	—	—	—	48MB	—
	Recording Capacity 录制容量	—	—	—	—	—
	File Format 文件格式	Still Image / 3D Still Image 静态图像 / 3D静态图像	JPEG, RAW (Sony ARW 2.3 format) / —	JPEG (DCF Ver.2.0, Exif Ver.2.3, MPF Baseline compliant), RAW (Sony ARW 2.3 format) / —	JPEG, RAW (Sony ARW 2.3 format) / —	JPEG / MPF
Video Compression 视频压缩	AVCHD Ver2.0 / MP4 DCF ⁷ / DPOF ⁸	XAVC S / AVCHD format Ver.2.0 compatible / MP4 DCF ⁷ / DPOF ⁸ / EXIF / MPF	AVCHD Ver2.0 / MP4 DCF ⁷ / DPOF ⁸	AVCHD Ver2.0 / MP4 DCF ⁷ / DPOF ⁸	AVCHD Ver2.0 / MP4 DCF ⁷ / DPOF ⁸ / EXIF / MPF	
Image File Format (Still Image) 图像文件格式 (静态图像)	—	—	—	—	—	
Movie Recording Mode (Approx.) 动态影像录制模式 (约)	—	—	[PAL Mode] AVCHD: 28M PS (1,920 x 1,080 / 50p) / 24M FX (1,920 x 1,080 / 50i) / 17M FH (1,920 x 1,080 / 50i) / 24M FX (1,920 x 1,080 / 25p) / 17M FH (1,920 x 1,080 / 25p), XAVC S: 50p 50M (1,920 x 1,080 / 50p) / 25p 50M (1,920 x 1,080 / 25p) / 100p 50M (1,280 x 720 / 100p), MP4: 12M (1,440 x 1,080 / 25fps) / 3M VGA (640 x 480 / 25fps) [NTSC Mode] AVCHD: 28M PS (1,920 x 1,080 / 60p) / 24M FX (1,920 x 1,080 / 60i) / 17M FH (1,920 x 1,080 / 60i) / 24M FX (1,920 x 1,080 / 24p) / 17M FH (1,920 x 1,080 / 24p), XAVC S: 60p 50M (1,920 x 1,080 / 60p) / 30p 50M (1,920 x 1,080 / 30p) / 24p 50M (1,920 x 1,080 / 24p) / 120p 50M (1,280 x 720 / 120p), MP4: 12M (1,440 x 1,080 / 30fps) / 3M VGA (640 x 480 / 30fps)	AVCHD: 28M PS (1,920 x 1,080 / 50p) / 24M FX (1,920 x 1,080 / 50i) / 17M FH (1,920 x 1,080 / 50i) / 24M FX (1,920 x 1,080 / 25p) / 17M FH (1,920 x 1,080 / 25p), XAVC S: 50p 50M (1,920 x 1,080 / 50p) / 25p 50M (1,920 x 1,080 / 25p) / 100p 50M (1,280 x 720 / 100p), MP4: 12M (1,440 x 1,080 / 25fps) / 3M VGA (640 x 480 / 25fps) AVCHD: 28M PS (1,920 x 1,080 / 50p) / 24M FX (1,920 x 1,080 / 50i) / 17M FH (1,920 x 1,080 / 50i) / 24M FX (1,920 x 1,080 / 25p) / 17M FH (1,920 x 1,080 / 25p), XAVC S: 60p 50M (1,920 x 1,080 / 60p) / 30p 50M (1,920 x 1,080 / 30p) / 24p 50M (1,920 x 1,080 / 24p) / 120p 50M (1,280 x 720 / 120p), MP4: 12M (1,440 x 1,080 / 30fps) / 3M VGA (640 x 480 / 30fps)	AVCHD: 28M PS (1,920 x 1,080 / 50p) / 24M FX (1,920 x 1,080 / 50i) / 17M FH (1,920 x 1,080 / 50i) / 24M FX (1,920 x 1,080 / 25p) / 17M FH (1,920 x 1,080 / 25p), XAVC S: 60p 50M (1,920 x 1,080 / 60p) / 30p 50M (1,920 x 1,080 / 30p) / 24p 50M (1,920 x 1,080 / 24p) / 120p 50M (1,280 x 720 / 120p), MP4: 12M (1,440 x 1,080 / 30fps) / 3M VGA (640 x 480 / 30fps)	
Battery life and number of images you can record / view (Approx.) 拍摄静态图像时 (图像数量 / 电池寿命)	220 images / 110min. (with LCD on)	Monitor: 320images / 160min., ViewFinder: 230images / 115min.	330 images / 165min. (with LCD on)	310 images / 155min. (with LCD on)	470 images / 235min. (with LCD on)	
When shooting still images (No. of images / Battery life) 拍摄静态图像时 (图像数量 / 电池寿命)	60min.	Monitor: 85min., ViewFinder: 90min.	80min.	90min.	100min.	
When shooting movies (min.) 拍摄动态影像时 (分钟)	—	—	—	—	—	
Print 打印						

Lens Style Camera Specifications 镜头型数码相机

Model Name 机型名称	ILCE-QX1L(CE7)	DSC-QX30(CE7)	DSC-QX10(CE7)
Image Sensor 影像传感器	APS-C type Exmor CMOS Sensor	1/2.3 type Exmor R CMOS Sensor	1/2.3 type Exmor R CMOS Sensor
Lens*1 镜头*1	Sony E-mount lenses F-number (Maximum Aperture) F值 (最大光圈) (SEL P1650: F3.5 (Wide) - 5.6 (Tele)) Focal Length (f=) 焦距 (f=) (SEL P1650: f= 16-50) 35mm equivalent 35mm等效 (SEL P1650: f= 24-75 (APS-C))*2 Optical Zoom Magnification 光学变焦倍率 (SEL P1650: approx. 3x) Clear Image Zoom 清晰影像变焦 (SEL P1650: approx. 6x) (Both still image and movie)	Sony G Lens F3.5 (Wide) - 6.3 (Tele) f= 4.3-129mm f= 24-720mm (Still 4:3) 30x 60x (Both still image and movie)	Sony G Lens F3.3 (Wide) - 5.9 (Tele) f= 4.45-44.5mm f= 25-250mm (Still 4:3) 10x —
Camera Function 相机功能	Imaging Processor 影像处理器 SteadyShot 防抖功能 Focus Mode 对焦模式 Focus Area 对焦区域 ISO Sensitivity ISO感光度 White Balance Mode 白平衡模式 Shooting Mode (Still Image) 拍摄模式 (静态影像) Continuous shooting Speed (Maximum) 连拍速度 (最大) Flash 闪光灯	BIONZ X Optical Single-shot AF / Manual Focus Contrast-detection AF Multi Point AF Auto (ISO 100-16000) Auto / Daylight / Cloudy / Incandescent / Fluorescent (Warm White) / Fluorescent (Cool White) / Fluorescent (Day White) / Fluorescent (Daylight) / Flash / Color Temperature <2500 to 9900K> Intelligent Auto / Superior Auto / Program Auto / Aperture priority / Shutter Speed priority 3.5 fps Built-in flash (GN4)	BIONZ Optical Single-shot AF Multi Point AF Auto (ISO 100-12800)*4 Auto / Daylight / Cloudy / Incandescent / Fluor (Cool White) / Fluor (Day White) / Fluor (Daylight) Intelligent Auto / Superior Auto / Program Auto / Aperture Priority / Shutter Speed Priority 10 fps —
Recording 录制	Media 媒体 Recording Format 录制格式 Still image 静态影像 Movie 动态影像	Memory Stick Micro / Memory Stick Micro (Mark2) / microSD Memory Card / microSDHC Memory Card / microSDXC Memory Card JPEG MP4 28M (1,920 x 1,080 60p) / 16M (1,920 x 1,080 30p)	Memory Stick Micro / Memory Stick Micro (Mark2) / microSD Memory Card / microSDHC Memory Card / microSDXC Memory Card JPEG MP4 16M (1,920 x 1,080 30p)*5
Interface 接口	Input and Output Terminal 输入 / 输出端子 Wi-Fi / NFC Wi-Fi / NFC	Multi / Micro USB Terminal , Hi-Speed USB (USB2.0) ● / ●	Multi / Micro USB Terminal , Hi-Speed USB (USB2.0) ● / ●
Power 电源	Battery System 电池系统 USB Charge USB充电 Still images (Approx.) 静态影像 (约) Movies (Continuous) (Approx.) 动态影像 (连续拍摄) (约)	NP-FW50 ● 440 images 150min.	NP-BN1 ● 200 images 45min.
Others 其他	Dimensions (WxHxD) (Approx.) (without Smartphone Attachment / Lens) 尺寸 (宽 x 高 x 深) (不含智能手机壳配件 / 镜头) (约) Mass (Body only) (Approx.) (without Smartphone Attachment / Lens) 重量 (仅机身) (不含智能手机壳配件 / 镜头) (约) Supplied Accessories 随机配件	74.0 x 69.5 x 52.5mm 158g SEL P1650, Lens cap, Rechargeable Battery NP-FW50, Smartphone Attachment, Micro USB cable, Wrist Strap	62.4 x 61.8 x 33.3mm 90g Rechargeable Battery Pack NP-BN1, Smartphone Attachment, Micro USB cable, Wrist Strap

Walkman® Specifications MP3播放器规格

Model Name 机型名称	NWZ-ZX1(E)	NWZ-A15(E)	NWZ-WS613(E)	NWZ-W274SJE	NWZ-W273SJE	NWZ-WH303JE	NWZ-E383JE	NWZ-B183FJE
Capacity 容量	128GB	16GB	4GB	8GB	4GB	4GB	4GB	4GB
Colors 颜色	Silver	Black / Silver	Black / White / Blue / Lime Green	Black	Special Red / Special Black / Black / Blue / Pink / White / Orange	Black / White	Black / Blue / Red / Pink	Gold / Blue / Red / Pink
Use 用途	Music / Video / Photo	Music / Video / Photo / FM	Music	Music	Music	Music	Music / Video / Photo / FM	Music / FM / Rec (FM)
Podcast*10 播客*10	—	●	—	—	—	—	—	—
FM Tuner FM调频	—	● (87.5 to 108.0MHz)	—	—	—	—	● (87.5 to 108.0 MHz)	● (87.5 to 108.0 MHz)
Bluetooth® 蓝牙功能	●	●	●	●	●	●	●	●
Audio Formats (Codec)*11 音频格式 (编解码器)*11	MP3 / WMA*12 / Linear PCM / AAC*12 / HE-AAC / FLAC / Apple Lossless / AIFF	MP3 / WMA*12 / Linear PCM / AAC*12 / HE-AAC / FLAC / Apple Lossless / AIFF	MP3 / WMA / AAC*12 / Linear PCM	MP3 / WMA / AAC-LC*12 / Linear PCM	MP3 / WMA / AAC-LC*12 / Linear PCM	MP3 / WMA*12 / AAC-LC*12 / Linear PCM	MP3 / WMA*12 / AAC-LC*12 / Linear PCM	MP3 / WMA*12
Video Formats (Codec) 视频格式 (编解码器)	Music: AAC-LC (for AVC, MPEG-4) / WMA (for Windows Media® Video 9) / Video: AVC (H.264 / AVC) / MPEG-4 / Windows Media Video 9*12	Music: AAC-LC (for AVC, MPEG-4) / WMA (for Windows Media® Video 9) / Video: AVC (H.264 / AVC) / Windows Media Video 9*12*13	—	—	—	—	—	—
Photo Format (Codec)*14 照片格式 (编解码器)*14	JPEG / PNG	JPEG / PNG	—	—	—	—	—	—
Display 显示	4.0-inch, TFT color display	2.2 inch, TFT color LCD, QVGA (320x240)	—	—	—	—	1.77-inch, TFT color display	0.9-inch OLED
Dimensions (W x H x D) (Approx.) 尺寸 (宽x高x深) (约)	60.7 x 122.8 x 15.3mm	43.6 x 109 x 8.7mm	—	—	—	—	43.4 x 87.7 x 9.9mm	84.8 x 23.6 x 15.3mm
Mass (Approx.) 重量 (约)	139g	87.5g	37g	29g	29g	292g	52g	30g
Supplied Accessories 随机配件	USB cable (WM-Port) / Carrying Pouch / Spacer / Quick Start Guide	USB cable (WM-Port) / Quick Start Guide	Ear Buds (S/M/L/L), Swimming Ear Buds (S/M/L/L), USB Cradle, Adjustment band, Remote Commander, Quick Start Guide, Notes on Water Resistant Specifications	Ear Buds (S/M/L/L), Swimming Ear Buds (S/M/L/L), USB Cradle, Adjustment band, Quick Start Guide, Notes on Water Resistant Specifications	Ear Buds (S/M/L/L), Swimming Ear Buds (S/M/L/L), USB Cradle, Adjustment band, Quick Start Guide, Notes on Water Resistant Specifications	USB Cable, Head phone cable, Software (Media Go, WALKMAN Guide, Help Guide*15), Quick Start Guide	Headphones (MDR-E804YL), Quick Start Guide, USB cable (mini-B), Software (Media Go, WALKMAN Guide, Help Guide*15)	Headphones (MDR-E804YLP), Quick Start Guide
Music Searching Methods 音乐搜索方式	All Songs / Albums / Artists / Genres / Release year / Recently added / Playlists / Folders / SensMe™ Channel / Cover art view	All Songs / Album / Artist / Genre / Release Year / Playlists / Bookmark / Folder	—	—	—	All Songs / Playlists / Folder	All Songs / Album / Artist / Genre / Release Year / Folder / Playlists	All Songs / Albums / Artists / Genres / Folders
Music Play Mode 音乐播放模式	Normal / Repeat / Shuffle	Normal / Repeat / Shuffle / Shuffle & Repeat / Repeat 1 Song Playback Range (All Range Selected Range)	All repeat / All shuffle / Folder repeat / Playlist repeat / Album repeat	Repeat / Shuffle & Repeat	Repeat / Shuffle & Repeat	Normal / Shuffle	Normal / Repeat / Shuffle / Shuffle & Repeat / Repeat 1 Song	Normal / Shuffle / Repeat / Repeat 1 Song
Photo Play Mode 照片播放模式	Normal / Slide show / Slide show repeat / Slide show interval (0.5Sec-20.0Sec)	Normal	—	—	—	—	Normal / Slide Show / Slide Show Repeat / Slide Show Interval (Short / Normal / Long)	—
Sound Effects 音效	ClearAudio+ (On / Off) / Equalizer / Clear Bass / Surround sound / DSEE HX (On / Off) / Dynamic normalizer (On / Off) / xLOUD (On / Off) / Clear Phase (On / Off)	DSEE HX / Clear Audio+ / Equalizer / Clear Stereo / Clear Bass VPT (surround) / Dynamic Normalizer / DPC (Speed Control)	Equalizer / Dynamic Normalizer / Clear Phase	—	—	Clear Bass / Clear Phase / Sound Enhancement (1/2) / Dynamic Normalizer (On / Off) / Illumination (On / Off)	5Band equalizer (Heavy / Pop / Jazz / Unique / Custom 1 / Custom 2) & Clear Bass, Clear Stereo, Dynamic Normalizer (On / Off)	5Band equalizer Heavy / Pop / Jazz / Unique / Custom & Bass Boost
Power Source 电源	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via a USB connector of the player)	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via a USB connector of the player)	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via the supplied USB cable)	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via a USB connector of the player)	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via a USB connector of the player)	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via a USB connector of the player)	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via the supplied USB cable)	Built-in Rechargeable lithium-ion Battery / USB power (from a computer via a USB connector of the player)
USB-based Charging Time (Approx.) USB充电时间 (约)	3h.	4h.	1.5h.	1.5h.	1.5h.	2h.	2h.	70min.
Continuous Playback Time (Approx.) 连续播放时间 (约)	Music: 32h.*16 / Video: 5h.*17	Music: 50h.*16 / Video: 14h.*17	Music: 8h.*16	Music: 8h.*16	Music: 8h.*16	20h. for Head phone / 5h. for Speaker	Music: 30h.*16 / Video: 4h.*17	Music: 20h.*16
3minutes Charge 3分钟充电	—	—	Up to 60minutes play back (MP3 128kbps)	Up to 60minutes play back (MP3 128kbps)	Up to 60minutes play back (MP3 128kbps)	Up to 60minutes play back (MP3 128kbps)	—	Up to 90minutes play back (MP3 128kbps)
System Requirements Computer 系统要求电脑	—	—	— Windows® XP Professional* (Service Pack 3 or later) — Windows Vista® Home Basic (Service Pack 2 or later) — Windows Vista® Home Premium (Service Pack 2 or later) — Windows Vista® Ultimate (Service Pack 2 or later) — Windows® 7 Starter (Service Pack 1 or later) — Windows® 7 Home Premium (Service Pack 1 or later) — Windows® 7 Ultimate (Service Pack 1 or later) — Windows® 8 — Mac OS X v10.6 or later * Excluding 64-bit OS versions. Not supported by OSs other than above. [Compatibility mode] for Windows® XP (included with Windows Vista® and Windows® 7) is not supported	— Windows® XP Professional* (Service Pack 3 or later) — Windows Vista® Home Basic (Service Pack 2 or later) — Windows Vista® Home Premium (Service Pack 2 or later) — Windows Vista® Ultimate (Service Pack 2 or later) — Windows® 7 Starter (Service Pack 1 or later) — Windows® 7 Home Premium (Service Pack 1 or later) — Windows® 7 Professional (Service Pack 1 or later) — Windows® 8 Pro	— Windows® XP Home Edition* (Service Pack 3 or later) — Windows Vista® Home Basic (Service Pack 2 or later) — Windows Vista® Business (Service Pack 2 or later) — Windows Vista® Starter (Service Pack 1 or later) — Windows® 7 Starter (Service Pack 1 or later) — Windows® 7 Home Premium (Service Pack 1 or later) — Windows® 7 Ultimate (Service Pack 1 or later) — Windows® 8 — Mac OS X v10.6 or later * Excluding 64-bit OS versions. Not supported by OSs other than above. [Compatibility mode] for Windows® XP (included with Windows Vista® and Windows® 7) is not supported	— Windows® XP Home Edition* (Service Pack 3 or later) — Windows Vista® Home Basic (Service Pack 2 or later) — Windows Vista® Business (Service Pack 2 or later) — Windows Vista® Starter (Service Pack 1 or later) — Windows® 7 Starter (Service Pack 1 or later) — Windows® 7 Home Premium (Service Pack 1 or later) — Windows® 7 Professional (Service Pack 1 or later) — Windows® 8 Pro	— Windows Vista® Home Basic (Service Pack 2 or later) — Windows Vista® Home Premium (Service Pack 2 or later) — Windows Vista® Business (Service Pack 2 or later) — Windows Vista® Starter (Service Pack 1 or later) — Windows® 7 Starter (Service Pack 1 or later) — Windows® 7 Home Premium (Service Pack 1 or later) — Windows® 7 Professional (Service Pack 1 or later) — Windows® 8 — Windows® 8 Pro — Windows® 8.1 — Windows® 8.1 Pro Not supported by OSs other than above. Pre-installed only supported.	

*1 ILCE-QX1L Supplied Lens is SELP1650. ILCE-QX1L的标配镜头为SELP1650。*2 With interchangeable-lens digital camera incorporating APS-C type image sensors. 当使用在具有APS-C型影像传感器的微单相机上时。*3 Image stabilization supported on lens. 镜头支持影像防抖功能。*4 Achieved by using overlay burst shooting. 使用重叠连拍功能实现。*5 Firmware update may be necessary. 镜头支持影像防抖功能。*6 Class 4 or higher. Class 4或更高。*7 Supports Micro USB compatible device. 支持微型USB兼容设备。*8 IP tests are performed under our own test methods. 以本公司测试方法进行IP测试。*9 As for dust-proof performance, there is no guarantee that the binoculars will not become scratched. 关于防尘性能, 并不保证望远镜不会

Digital Recording Binoculars Specifications 摄录望远镜规格

Model Name 机型名称	DEV-30(JE)
Image Sensor 影像传感器	2x 1/3.91 type Exmor R CMOS Sensor Gross pixels (Approx.) 总像素 (约) 5,430K pixels (2D) / 2x 5,430K pixels (3D)
Recording 录制	Still Image Mode 静态图像模式 Still Image Max Effective 静态图像最大有效 Magnification (Movie Mode) 放大倍率 (动态影像模式) Magnification (Photo Mode) 放大倍率 (照片模式) Video Format 视频格式 Video Mode (Resolution) 视频模式 (分辨率) Recording and Playback Times (32GB Memory Card) (2ch) (Approx.) 拍摄和播放时间 (32GB 存储卡) (2声道) (约)
Viewfinder 取景器	Type 类型 2x 0.5 type Electrical Viewfinder 2,359,296 dots (1,024 x 3 [RGB] x 768)
ViewfinderAdvanced Features 取景器高级功能	Image Stabilization 图像稳定 Optical SteadyShot image stabilization with Active mode (Wide to Tele [2D] / wide [3D])
Interface 接口	Memory Card Slot 存储卡插槽 Memory Stick PRO Duo (Mark 2) / Memory Stick PRO-HG Duo / Memory Stick XC-HG Duo / SD / SDHC / SDXC Memory Card*6 HD Output 高清输出 HDMI Out (micro) 3D HD Output 3D高清输出 HDMI Out (micro) Multi / Micro USB terminal*7 多功能 / 微型 USB 端子*7 Headphone Jack 耳机插孔 Stereo Minijack Microphone Input 麦克风输入 Stereo Minijack DC IN DC IN (直流电源输入) 接口 A/V Remote Terminal A/V遥控端子 —
Dimensions (W x H x D) (Body only including protrusion) (Approx.) 尺寸 (宽x高x深) (仅机身, 包括突出部位) (约)	148.5 x 72.5 x 157.5mm
Mass (Body only) (Approx.) 重量 (仅机身) (约)	765g ● (IPX4 equivalent)
Rain Proof*8 防雨*8	— ● (IP54 equivalent)
Dust Proof*8*9 防尘*8*9	— ● (IP54 equivalent)
Supplied Accessories 随机配件	Rechargeable Battery Pack (NP-FV70), AC adaptor, Power Cord, Neck Strap, Lens Cap, HDMI Micro USB Connecting Cable, Micro USB Cable, CD-ROM, *Operation Guide*

Headphones Specifications 耳机规格

Model Name 机型名称	MDR-XB950BT(E)	MDR-AS800BT(E)	MDR-1RBTKM2(JE)	MDR-10RBTK(JE)	MDR-ZK750BN(JE)	MDR-EX31BN(JE)
Bluetooth® technology Bluetooth®技术	Version 3.0					
Power Output 功率输出	Bluetooth® power class2					
Effective Range 有效范围	Line of sight approx.30ft (10m)					
Frequency Range 频率范围	2.4GHz band (2.400GHz-2.4835GHz)					
Interface (兼容的Bluetooth®配置协议)	A2DP (AdvancedAudio Distribution Profile) (高级音频发送配置协议) AVRCP (AudioVideo Remote Control Profile) (音频视频远程控制配置协议) HFP (Hands-free Profile) (免提配置协议) HSP (Head set Profile) (耳机配置协议)	●	●	●	●	●
Supported Audio Format(s) 支持的音频格式	SBC / AAC / aptX					
Supported Content Protection 支持的内容保护方式	SCMS-T					
Frequency Range (A2DP) 频率范围 (A2DP)	20Hz - 20,000Hz (44.1kHz Sampling)					
Volume Control 音量控制	●	●	●	●	●	●
Battery Life (continuous music playback time) 电池使用时间 (连续音乐播放时间)	Max. 20 Hours	Max. 4.5 Hours	Approx. 30 Hours	Max. 17 Hours	(NC ON) Approx. 13 Hours (NC OFF) Approx. 19 Hours	(NC ON) Approx. 9 Hours (NC OFF) Approx. 10.5 Hours
Battery Life (continuous phone talking time) 电池使用时间 (连续通话时间)	Max. 20 Hours	Max. 4.5 Hours	Approx. 30 Hours	Max. 17 Hours	(NC ON) Approx. 10 Hours (NC OFF) Approx. 12 Hours	(NC ON) Approx. 6.5 Hours (NC OFF) Approx. 7.5 Hours
Battery Charging Time 充电时间	Approx. 4 Hours	Approx. 2 Hours	Approx. 6 Hours	Approx. 2.5 Hours	Approx. 2.5 Hours	Approx. 2.5 Hours

出现刮伤。*10 Photo contents are not supported. 不支持照片内容。*11 Sampling frequency may not correspond to all encoders. 取样频率可能不会与所有的编码器一致对应。*12 Copyright protected files cannot be played back. 不会播放受著作权保护的文件。*13 Some WMV files can be played back only by transferring using Windows Media® Player. 某些WMV文件只能通过Windows Media® Player传送后才能播放。*14 Some photo files cannot be played back, depending on their file formats. 根据文件格式的不同, 某些照片文件无法重放。*15 In the built-in memory. 内置记忆体中。*16 When playing MP3 128kbps. 当播放MP3 128kbps时。*17 When playing MPEG-4 384kbps. 当播放MPEG-4 384kbps时。

Striving to achieve a zero environmental footprint

Sony Road to Zero Environmental Plan

The zero in Road to Zero means a zero environmental footprint. This is the ultimate goal of our environmental plan, which inspires innovative thinking and technology. To put Sony firmly on the road to zero, environmental goals are based on these four perspectives.

Promoting biodiversity

Respecting the natural environment

Controlling chemical substances

Careful management, beginning with raw materials

Conserving resources

Eliminating use of virgin materials

Curbing climate change

Toward zero-emission products



Visit Sony Overseas Models Website 访问索尼海外规格产品网站

sony.jp/overseas/

Please access to Sony Overseas Models website for product information, shop locations, and support & service for products purchased.
如需了解更多产品信息、商铺位置以及所购产品的技术支持与服务，请浏览索尼海外规格产品网站。

 Safety Cautions 安全注意事项	<p>To ensure correct use of this product, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Do not use headphones while driving and cycling, etc. 为确保正确使用本产品，使用前请仔细阅读“使用说明书”。如果未能遵守所有安全防护事项，可能会导致火灾、电击或其他事故的发生。在从事车辆驾驶或骑自行车等活动时，请勿使用耳机。</p>
Backup recommended 备份建议	<p>Please be aware of the possibility of unforeseen camera or recording medium errors. These may mean that you can no longer take photos and videos or, due to data destruction or disappearance, may make playback of recorded data impossible. We therefore recommend that you regularly back up valuable recorded content. 万一因相机或记录媒体等故障导致无法拍摄或记录内容损坏、消失而无法播放时，我们不对影像或声音等记录内容提供保障，敬请谅解。重要的记录内容请定期备份。</p>

•Sony Corporation
Sony Marketing (Japan) Inc.
1-7-1 Konan Minato-ku, Tokyo, 108-0075 Japan

•Sony Customer Information Center Japan
 ◎ For information about how to purchase or use our products, and for other assistance, please call our Customer Hotline.
Free Dial 0120-777-886
 (Toll-free number available only in Japan. Assistance available in Japanese language only.)
 ○ Mobile/PHS phone callers please dial **050-3754-9555**
 ○ Service available
 Mon. to Fri. 9:00-18:00
 Sat., Sun. and Holidays ... 9:00-17:00

•Showroom 样品陈列室
 Tokyo: Sony Bldg., 3-1 Ginza 5-chome, Chuo-ku, (03)3573-2563
 东京都：中央区銀座5丁目3-1 索尼大厦 (03)3573-2563
 Come see the Showroom to find wide range of Sony products and selected items listed in this catalog.
 You can experience leading technology and design, all in one place.
 欢迎莅临索尼样品陈列室，包括本目录精选产品在內，您可浏览更多、更丰富的索尼产品。在这里，即可体验当今世界上最先进的科技和设计理念。

- SONY is a trademark of Sony Corporation.
- Cyber-shot, **Cyber-shot**, **α**, Handycam, **HANDYCAM**, InfoLITHIUM, ActiFORCE, **ActiFORCE**, Walkman, **WALKMAN**, **W**, are registered trademarks of Sony Corporation.
- XAVC S, **XAVC S**, G Lens, **G**, Exmor, Exmor R, BIONZ, BIONZ X, **BIONZ X**, Memory Stick, Memory Stick Duo, Memory Stick PRO, Memory Stick PRO Duo, Memory Stick PRO-HG Duo, Memory Stick Micro, **MEMORY STICK DUO**, **MEMORY STICK PRO**, **MEMORY STICK PRO DUO**, **MEMORY STICK PRO-HG DUO**, MagicGate and **MAGIC GATE** are trademarks of Sony Corporation.
- ZEISS Tessar and **ZEISS** are trademarks of Carl Zeiss AG.
- AVCHD and **AVCHD** are trademarks of Panasonic Corporation and Sony Corporation.
- HDMI, **HDMI** and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.
- The Wi-Fi Protected Setup Identifier Mark is a mark of the Wi-Fi Alliance.
- N-Mark is a registered trademark of the NFC Forum.
- Microsoft, Windows, Windows Vista, Windows Media are trademarks or registered trademarks of Microsoft Corporation.
- Macintosh, Mac OS, the Mac OS logo, iMac, iBook, PowerBook, Power Mac and eMac are trademarks or registered trademarks of Apple Inc.
- The Bluetooth word mark, figure mark, and combination mark are all trademarks that are owned by the Bluetooth SIG and licensed out for use to companies that are incorporating Bluetooth wireless technology into their products.
- SD and SDHC Logo are trademarks of SD-3C, LLC.
- All other product and company names are trademarks or registered trademarks of their respective companies.

- Availability is limited to model in stock. 产品的供应因各型号产品库存情况而异。
- Design and specifications are subject to change without notice. 产品设计及参数可能会发生变更，恕不事先通知。
- M.S.R.P.: Manufacturer's Suggested Retail Price. M.S.R.P.: 制造商建议零售价。
- For more information on the products listed in this catalog, see the catalogs of the individual products or ask a retailer. 关于此综合目录中产品的详情，请参考每个品目的产品目录，或与销售店联系咨询。

Contents of this catalog are valid as of February 2015

Sony Showroom
 Sony Building / Sukiyabashi,
 Ginza, Chuo-ku, Tokyo
 URL: sonybuilding.jp/e/

